


Environmental Product Declaration (EPD)
According to ISO 14025 and EN 15804



Veltitech 120

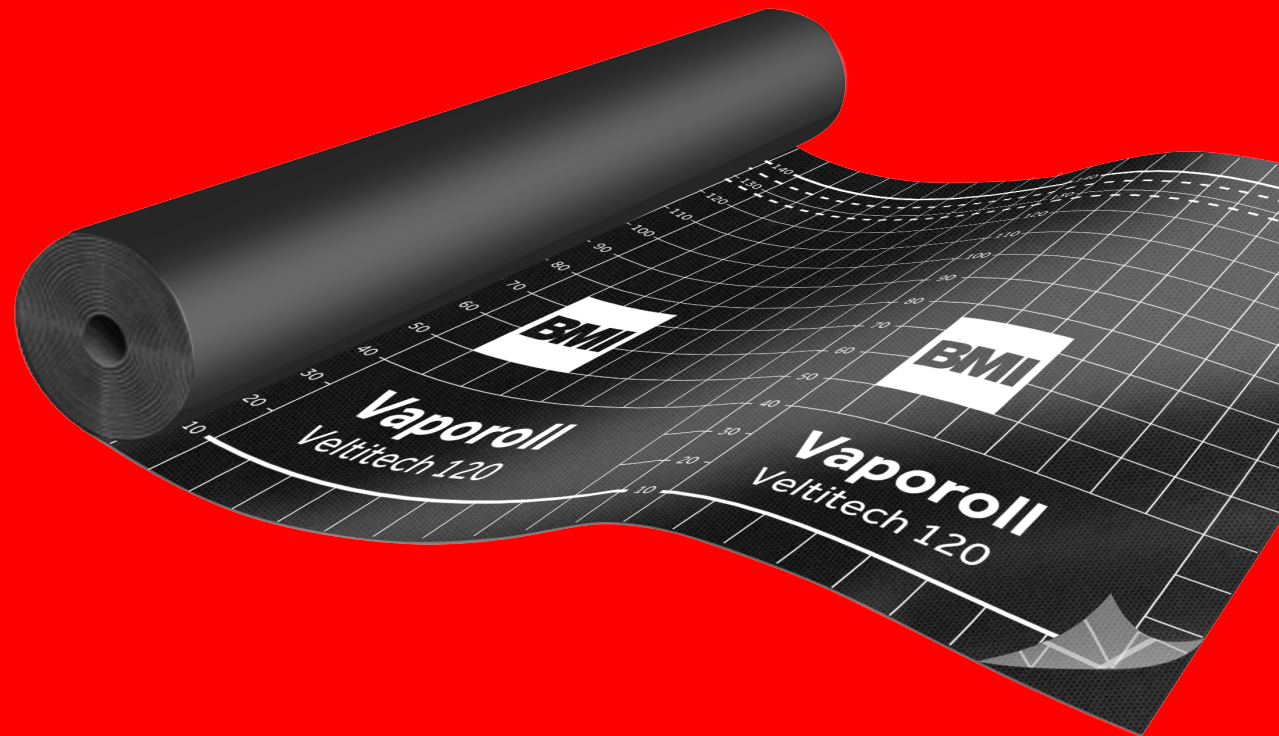

Registration number:	EPD-Kiwa-EE-176252-EN
Issue date:	17-12-2024
Valid until:	17-12-2029
Declaration owner:	BMI Group Holdings UK Limited
Publisher:	Kiwa-Ecobility Experts
Programme operator:	Kiwa-Ecobility Experts
Status:	verified

1 General information

1.1 PRODUCT

Veltitech 120

1.2 REGISTRATION NUMBER

EPD-Kiwa-EE-176252-EN

1.3 VALIDITY

Issue date: 17-12-2024

Valid until: 17-12-2029

1.4 PROGRAMME OPERATOR

Kiwa-Ecobility Experts
Wattstraße 11-13
13355 Berlin
DE



Raoul Mancke

(Head of programme operations, Kiwa-Ecobility Experts)



Dr. Ronny Stadie

(Verification body, Kiwa-Ecobility Experts)

1.5 OWNER OF THE DECLARATION

Manufacturer: BMI Group Holdings UK Limited

Address: Thames Tower, Station Road, UK, RG1 1LX Reading, UK

E-mail: info.group@bmigroup.com

Website: <https://bmigroupinternational.com/>


Production location: BMI Ennepetal

Address production location: Scharpenberger Str. 72-90, 58256 Ennepetal, Germany

1.6 VERIFICATION OF THE DECLARATION

The independent verification is in accordance with the ISO 14025:2011. The LCA is in compliance with ISO 14040:2006 and ISO 14044:2006. The EN 15804:2012+A2:2019 serves as the core PCR.

☐ Internal ☒ External



Anne Kees Jeeninga, Advieslab

1.7 STATEMENTS

The owner of this EPD shall be liable for the underlying information and evidence. The programme operator Kiwa-Ecobility Experts shall not be liable with respect to manufacturer data, life cycle assessment data and evidence.

1.8 PRODUCT CATEGORY RULES

Kiwa-Ecobility Experts (Kiwa-EE) – General Product Category Rules (2022-02-14).
Product category rules EN 15804 +A2 NPCR 022 Part B for roof waterproofing version 2.0
Issue date: 31.03.2022 Valid to: 06.06.2023 validity extended to 31.12.2024 (PCR EPD Norge)

1.9 COMPARABILITY

In principle, a comparison or assessment of the environmental impacts of different products is only possible if they have been prepared in accordance with EN 15804+A2. For the evaluation of the comparability, the following aspects have to be considered in particular: PCR used, functional or declared unit, geographical reference, the definition of the system boundary, declared modules, data selection (primary or secondary data,

1 General information

background database, data quality), scenarios used for use and disposal phases, and the life cycle inventory (data collection, calculation methods, allocations, validity period). PCRs and general program instructions of different EPD program operators may differ. Comparability needs to be evaluated. For further guidance, see EN 15804+A2 (5.3 Comparability of EPD for construction products) and ISO 14025 (6.7.2 Requirements for comparability).

1.10 CALCULATION BASIS

LCA method R<THINK: Ecobility Experts | EN15804+A2

LCA software*: Simapro 9.1

Characterization method: EN 15804 +A2 Method v1.0

LCA database profiles: EcolInvent version 3.6

Version database: v3.17 (2024-05-22)

** Simapro is used for calculating the characterized results of the Environmental profiles within R<THINK.*


1.11 LCA BACKGROUND REPORT

This EPD is generated on the basis of the LCA background report 'Veltitech 120' with the calculation identifier ReTHiNK-76252.

2 Product

2.1 PRODUCT DESCRIPTION

2-layer underlay and roofing membranes are used as an additional rain protection measure under the roof covering. Quality requirements: Generally all permeables must comply with the EN 13859-1:2010 and most non permeables with the EN 13984:2013. There are a lot of other requirements, but this is product specific and country-specific.

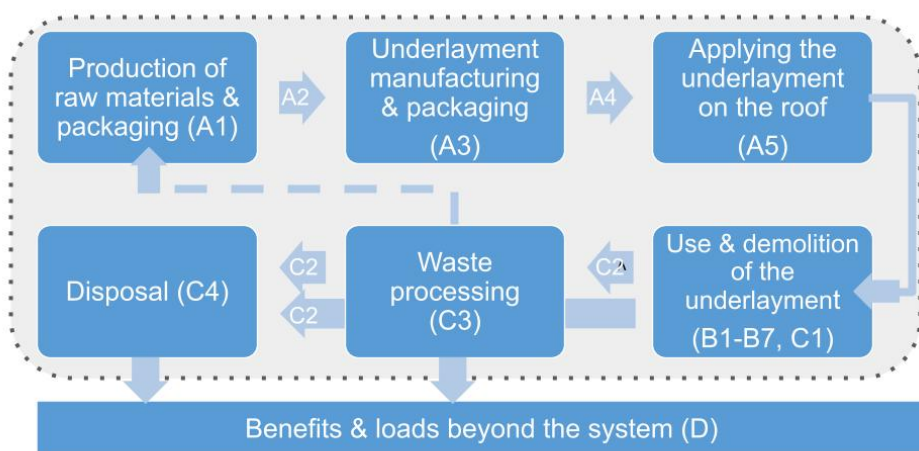

2.2 APPLICATION (INTENDED USE OF THE PRODUCT)

Depending on the requirements of the roof, underlay membranes are installed on a dimensionally stable base (formwork or insulation) or freely stretched underlay membranes as additional protection for the building against penetrating moisture, drifting snow and dust. They also improve the windproofness of the construction. The respective national regulations apply to their use. These include the generally recognized rules of technology, such as the technical regulations of the Central Association of German Roofing Trades, which normally guarantee flawless technical execution. The manufacturer's processing instructions implement these specifications in a product-related manner and must therefore also be taken into account.

2.3 REFERENCE SERVICE LIFE

RSL PRODUCT

Under normal conditions and when installed professionally, BMI underlayments have the same life expectancy as the product that goes on top of it being the pitched roofing.

The minimum RSL for pitched roofing is 60 years, based on the PCR of EPD Norge: 'Product category rules EN 15804 +A2 NPCR 022 Part B for roof waterproofing version 2.0 Issue date: 31.03.2022 Valid to: 06.06.2023 validity extended to 31.12.2024'. In this document expected life times are mentioned of

- 30 years for plastic and rubber sheets (like PP based underlays)
- 60 years for concrete and clay tiles

So, according to this document, the *minimum* expected lifetime for PP based underlays is 30 years. This is in line for instance with the BBA certificate valid for two Divoroll underlays <https://tinyurl.com/aktzxfzr> where it is stated that 'The products will be virtually unaffected by the normal conditions found in a roof space and will have a life comparable with that of a traditional roof tile underlay, provided they are not exposed to sunlight for long periods'. NB: the BBA certificate is about guarantees not about RSLs.

However, as explained before, it is more logical to use an expected lifetime of 60 years for PP based underlays from BMI, like the one covered by this EPD, based on the lifetime of the product that goes on top of it, being the pitched roofing. Otherwise, if clients of BMI make calculations for a building (with a minimum lifetime of 60 years), they have to calculate (in the tools that calculate the environmental load of the building) with a replacement of the underlayment after 30 years. However, BMI has not received any information from the market where that after 30 years the roof is taken off, including battens and counter battens. It doesn't seem to happen.

USED RSL (YR) IN THIS LCA CALCULATION:

60

RSL PARTS

Same as product

2.4 TECHNICAL DATA

BMI underlay and roofing membranes are manufactured exclusively in the BMI factory in Ennepetal, Germany and subjected to controls in the BMI laboratory facilities. With the products from this factory, BMI offers the right solution for every requirement: The underlay and roofing membranes are easy to lay and are characterized by high safety, special resistance and long durability. More information (in German): <https://www.bmigroup.com/de/unterdeckbahnen-und-zubehor/>

2 Product

2.5 SUBSTANCES OF VERY HIGH CONCERN

None of the substances contained in the product are listed in the "Candidate List of Substances of Very High Concern for authorisation", or they do not exceed the threshold with the European Chemicals Agency

2.6 DESCRIPTION PRODUCTION PROCESS

The preliminary products of the upper and lower fleece are already being manufactured delivered as a finished product. The upper fleece differs from the base fleece in the thickness of the fleece. The fleeces are delivered via unwinding systems supplied to the laminating station. The adhesive for lamination is melted in extruders and applied to the fleeces via wide slot nozzles in order to bond the functional membrane and the reinforcing grid. A special coating is applied to the surface. During assembly, the panels are printed with a logo and cut to size. If necessary, self-adhesive adhesive strips are applied to the long side edges of the sheets. Finally, the web rolls are stacked on reusable pallets and wrapped in foil.

All raw materials/auxiliary materials used are introduced into the production facility without any harmful effects on the environment. Contamination of the environment through exhaust air, wastewater or waste is excluded when the system is operating properly. There are no dust emissions that need to be cleaned during production and

packaging. The production personnel are not exposed to any health risks at any time during the production of the tracks. Residual production materials that arise, such as start-up goods or production transitions, are disposed of professionally. During the entire manufacturing process, no measures beyond the legally stipulated occupational safety and environmental protection measures for commercial operations are required. The whole production of underlays is without solvents. Even in the printing of the underlays water based colours are used.



2.7 CONSTRUCTION DESCRIPTION

The underlayments are attached to the roof using nails/ staples, Depending on the requirements of the roof, underlays are installed on a dimensionally stable base (formwork or insulation) or underlays are freely stretched. The minimum overlap is 100 mm. The attachment takes place in the overlap area above the adhesive strip.

3 Calculation rules

3.1 FUNCTIONAL UNIT

m2

1 m2 average breathable underlay and roofing membrane, 2 layers, including overlaps, and attached to the roof (with staples)

Reference unit: square meter (m2)

3.2 CONVERSION FACTORS

Description	Value	Unit
Reference unit	1	m2
Weight per reference unit	0.134	kg
Conversion factor to 1 kg	7.483566	m2

3.3 SCOPE OF DECLARATION AND SYSTEM BOUNDARIES

This is a Cradle to gate with options, modules C1-C4 and module D EPD. The life cycle stages included are as shown below:

(X = module included, ND = module not declared)

A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
X	X	X	X	X	X	X	X	ND	ND	X	X	X	X	X	X	X

The modules of the EN15804 contain the following:

Module A1 = Raw material supply	Module B5 = Refurbishment
Module A2 = Transport	Module B6 = Operational energy use
Module A3 = Manufacturing	Module B7 = Operational water use
Module A4 = Transport	Module C1 = De-construction / Demolition
Module A5 = Construction - Installation process	Module C2 = Transport
Module B1 = Use	Module C3 = Waste Processing
Module B2 = Maintenance	Module C4 = Disposal
Module B3 = Repair	Module D = Benefits and loads beyond the product system boundaries
Module B4 = Replacement	

3.4 REPRESENTATIVENESS

This EPD is representative for Veltitech 120, a product of BMI Group Holdings UK Limited. The results of this EPD are representative for European Union.

3.5 CUT-OFF CRITERIA

Product stage (A1-A3)

All input flows (e.g. raw materials, transportation, energy use, packaging, etc.) and output flows (e.g. production waste) are considered in this LCA. The total neglected input flows do therefore not exceed the limit of 5% of energy use and mass. Capital goods were excluded (packaging box factory: 0,008 kg GWP. Stretching: 0,4 GWP, both less than 5%)

3 Calculation rules

Construction process stage (A4-A5)

All input flows (e.g. transportation to the construction site, additional raw material use for construction, installation energy (use) of energy use for assembly, etc.) and output flows (e.g. construction waste, packaging waste, etc.) are considered in this LCA. The total neglected input flows do therefore not exceed the limit of 5% of energy use and mass.

Use stage (B1-B3)

All (known) input flows (e.g. raw materials, transportation, energy use, packaging, etc.) and output flows (e.g. emissions to soil, air and water, construction waste, packaging waste, end-of-life waste, etc.) related to the building fabric are considered in this LCA. The total neglected input flows do therefore not exceed the limit of 5% of energy use and mass.

End of life stage (C1-C4)

All input flows (e.g. energy use for demolition or disassembly, transport to waste processing, etc.) and output flows (e.g. end-of-life waste processing of the product, etc.) are considered in this LCA. The total neglected input flows do therefore not exceed the limit of 5% of energy use and mass.

Benefits and loads beyond the system boundary (Module D)

All benefits and loads beyond the system boundary resulting from reusable products, recyclable materials and/or useful energy carriers leaving the product system are considered in this LCA.

3.6 ALLOCATION

Allocation has not been applied in this LCA.

3.7 DATA COLLECTION & REFERENCE PERIOD

Data gathering: From 2nd of July, 2021 till 14th of December 2023. Reference period: 2022

3.8 ESTIMATES AND ASSUMPTIONS

For areas where accurate data was not available, such as transport or end-of-life scenarios, default values like for transport Lorry (Truck), unspecified (default) | market group for (GLO), EcoInvent 3.6 (2019) and for eol polyolefines (i.a. pe,pp) (i.a. pipes, foils) (NMD ID 57) for the main product and different eols for the packaging have been used.

3.9 DATA QUALITY

The data quality is based on the principle that the data quality of the data of the processes that take place at the producer of the product must be higher than that of the other processes. For the processes at the producer, so at the factory in Ennepetal, average product data have been used, retrieved from/ based on the ERP system. In addition to that as much as possible specific data from suppliers has been used. Every supplier was contacted. If no data were submitted background data was used.

3.10 POWER MIX

The power mix dataset taken is for Germany since the underlayments are produced in Ennepetal, Germany (Electricity (DE) - low voltage (max 1kV), EcoInvent 3.6 (2019), GWP of 0.6 kg CO₂ per kWh

4 Scenarios and additional technical information

4.1 TRANSPORT TO CONSTRUCTION SITE (A4)

For the transport from production place to assembly/user, the following scenario is assumed for module A4 of this EPD.

	Value and unit
Vehicle type used for transport	Lorry (Truck), unspecified (default) market group for (GLO)
Fuel type and consumption of vehicle	not available
Distance	750 km
Capacity utilisation (including empty returns)	50 % (loaded up and return empty)
Bulk density of transported products	inapplicable
Volume capacity utilisation factor	1

4.2 ASSEMBLY (A5)

The following information describes the scenarios for flows entering the system and flows leaving the system at module A5.

FLOWS ENTERING THE SYSTEM

For flows entering the system at A5 the following scenario is assumed for module A5.

	Value	Unit
<i>Materials used for installation/assembly</i>		
Organic coated steel coils (Granite & Estetic)	0.02038	kg
<i>Energy consumption for installation/assembly</i>		
Wire drawing, steel processing (EU) (only process)	0.02	kg

FLOWS LEAVING THE SYSTEM

The following output flows leaving the system at module A5 are assumed.

Description	Value	Unit
Output materials as result of loss during construction	3	%
Output materials as result of waste processing of materials used for installation/assembly at the building site	0.020	kg
Output materials as result of waste processing of used packaging	0.022	kg

4 Scenarios and additional technical information

4.3 USE STAGE (B1)

No significant environment impact in the use stage modules, because there is no (significant) emission to air, soil or water.

4.4 MAINTENANCE (B2)

For maintenance no input or output flows are modeled.

4.5 REPAIR (B3)

Repairs are not applicable within the functional unit and to achieve the reference service life.

4.6 OPERATIONAL ENERGY USE (B6)

Description	Service cycle (yr)	Number of cycles (n)	Amount per cycle	Total Amount	Unit
-------------	--------------------	----------------------	------------------	--------------	------

4.7 OPERATIONAL WATER USE (B7)

Description	Service cycle (yr)	Number of cycles (n)	Amount per cycle	Total Amount	Unit
-------------	--------------------	----------------------	------------------	--------------	------

4.8 DE-CONSTRUCTION, DEMOLITION (C1)

No inputs are needed for the product at the de-construction / demolition phase

4.9 TRANSPORT END-OF-LIFE (C2)

The following distances and transport conveyance are assumed for transportation during end of life for the different types of waste processing.

Waste Scenario	Transport conveyance	Not removed (stays in work) [km]	Landfill [km]	Incineration [km]	Recycling [km]	Re-use [km]
polyolefines (i.a. pe,pp) (i.a. pipes, foils) (NMD ID 57)	Lorry (Truck), unspecified (default) market group for (GLO)	0	100	150	50	0

4 Scenarios and additional technical information

Waste Scenario	Transport conveyance	Not removed (stays in work) [km]	Landfill [km]	Incineration [km]	Recycling [km]	Re-use [km]
finishes (adhered to wood, plastic, metal) (NMD ID 2)	Lorry (Truck), unspecified (default) market group for (GLO)	0	100	150	50	0

The transport conveyance(s) used in the scenario(s) for transport during end of life has the following characteristics.

	Value and unit
Vehicle type used for transport	Lorry (Truck), unspecified (default) market group for (GLO)
Fuel type and consumption of vehicle	not available
Capacity utilisation (including empty returns)	50 % (loaded up and return empty)
Bulk density of transported products	inapplicable
Volume capacity utilisation factor	1

4.10 END OF LIFE (C3, C4)

The scenario(s) assumed for end of life of the product are given in the following tables.
First the assumed percentages per type of waste processing are displayed, followed by the assumed amounts.

Waste Scenario	Region	Not removed (stays in work) [%]	Landfill [%]	Incineration [%]	Recycling [%]	Re-use [%]
polyolefines (i.a. pe,pp) (i.a. pipes, foils) (NMD ID 57)	NL	0	10	85	5	0
finishes (adhered to wood, plastic, metal) (NMD ID 2)	NL	0	0	100	0	0

Waste Scenario	Not removed (stays in work) [kg]	Landfill [kg]	Incineration [kg]	Recycling [kg]	Re-use [kg]
polyolefines (i.a. pe,pp) (i.a. pipes, foils) (NMD ID 57)	0.000	0.013	0.113	0.007	0.000
finishes (adhered to wood, plastic, metal) (NMD ID 2)	0.000	0.000	0.001	0.000	0.000
Total	0.000	0.013	0.114	0.007	0.000

4 Scenarios and additional technical information

4.11 BENEFITS AND LOADS BEYOND THE SYSTEM BOUNDARY (D)

The presented Benefits and loads beyond the system boundary in this EPD are based on the following calculated Net output flows in kilograms and Energy recovery displayed in MJ Lower Heating Value.

Waste Scenario	Net output flow [kg]	Energy recovery [MJ]
polyolefines (i.a. pe,pp) (i.a. pipes, foils) (NMD ID 57)	0.007	3.736
finishes (adhered to wood, plastic, metal) (NMD ID 2)	0.000	0.000
Total	0.007	3.736

5 Results

For the impact assessment, the characterization factors of the LCIA method EN 15804 +A2 Method v1.0 are used. Long-term emissions (>100 years) are not considered in the impact assessment. The results of the impact assessment are only relative statements that do not make any statements about end-points of the impact categories, exceedance of threshold values, safety margins or risks. The following tables show the results of the indicators of the impact assessment, of the use of resources as well as of waste and other output flows.

5.1 ENVIRONMENTAL IMPACT INDICATORS PER SQUARE METER

CORE ENVIRONMENTAL IMPACT INDICATORS EN15804+A2

Abbr.	Unit	A1	A2	A3	A1- A3	A4	A5	B1	B2	B3	B6	B7	C1	C2	C3	C4	D
AP	mol H+ eqv.	1.62E-3	3.32E-4	3.26E-4	2.28E-3	9.16E-5	1.84E-3	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	1.46E-5	1.35E-4	1.23E-6	-2.98E-4
GWP-total	kg CO2 eqv.	3.80E-1	1.39E-2	5.86E-2	4.53E-1	1.58E-2	1.28E-1	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	2.53E-3	3.04E-1	1.98E-3	-2.15E-1
GWP-b	kg CO2 eqv.	-1.14E-2	-3.88E-6	-1.88E-2	-3.02E-2	7.29E-6	2.03E-2	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	1.17E-6	4.61E-5	1.52E-6	2.47E-4
GWP-f	kg CO2 eqv.	3.90E-1	1.39E-2	7.72E-2	4.82E-1	1.58E-2	1.07E-1	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	2.53E-3	3.04E-1	1.97E-3	-2.15E-1
GWP-luluc	kg CO2 eqv.	1.01E-3	1.04E-5	2.32E-4	1.25E-3	5.79E-6	3.26E-4	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	9.25E-7	2.44E-5	6.97E-8	5.80E-6
EP-m	kg N eqv.	2.79E-4	7.70E-5	6.37E-5	4.20E-4	3.23E-5	1.33E-4	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	5.16E-6	3.71E-5	7.45E-7	-7.22E-5
EP-fw	kg P eq	1.06E-5	8.22E-8	6.54E-6	1.72E-5	1.59E-7	4.98E-6	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	2.55E-8	9.07E-7	2.53E-9	-1.42E-6
EP-T	mol N eqv.	3.10E-3	8.58E-4	7.41E-4	4.70E-3	3.56E-4	7.33E-3	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	5.69E-5	4.13E-4	4.53E-6	-8.18E-4
ODP		8.33E-9	2.83E-9	4.27E-9	1.54E-8	3.49E-9	7.08E-9	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	5.57E-10	9.24E-9	4.37E-11	-2.39E-8

AP=Acidification (AP) | **GWP-total**=Global warming potential (GWP-total) | **GWP-b**=Global warming potential - Biogenic (GWP-b) | **GWP-f**=Global warming potential - Fossil (GWP-f) | **GWP-luluc**=Global warming potential - Land use and land use change (GWP-luluc) | **EP-m**=Eutrophication marine (EP-m) | **EP-fw**=Eutrophication, freshwater (EP-fw) | **EP-T**=Eutrophication, terrestrial (EP-T) | **ODP**=Ozone depletion (ODP) | **POCP**=Photochemical ozone formation - human health (POCP) | **ADP-f**=Resource use, fossils (ADP-f) | **ADP-mm**=Resource use, minerals and metals (ADP-mm) | **WDP**=Water use (WDP)

5 Results

Abbr.	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B6	B7	C1	C2	C3	C4	D
	kg CFC 1l eqv.																
POCP	kg NMVOC eqv.	1.20E-3	2.28E-4	2.24E-4	1.65E-3	1.02E-4	3.42E-4	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	1.62E-5	1.11E-4	1.73E-6	-3.61E-4
ADP-f	MJ	1.10E+1	1.84E-1	1.57E+0	1.27E+1	2.38E-1	1.16E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	3.81E-2	2.31E-1	3.34E-3	-3.50E+0
ADP-mm	kg Sb- eqv.	3.54E-6	1.77E-7	7.47E-7	4.46E-6	4.00E-7	2.30E-4	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	6.40E-8	3.83E-7	1.50E-9	-1.61E-7
WDP	m3 world eqv.	2.34E-1	4.12E-4	4.91E-2	2.84E-1	8.53E-4	4.22E-2	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	1.36E-4	1.54E-2	1.43E-4	-2.63E-2

AP=Acidification (AP) | **GWP-total**=Global warming potential (GWP-total) | **GWP-b**=Global warming potential - Biogenic (GWP-b) | **GWP-f**=Global warming potential - Fossil (GWP-f) | **GWP-luluc**=Global warming potential - Land use and land use change (GWP-luluc) | **EP-m**=Eutrophication marine (EP-m) | **EP-fw**=Eutrophication, freshwater (EP-fw) | **EP-T**=Eutrophication, terrestrial (EP-T) | **ODP**=Ozone depletion (ODP) | **POCP**=Photochemical ozone formation - human health (POCP) | **ADP-f**=Resource use, fossils (ADP-f) | **ADP-mm**=Resource use, minerals and metals (ADP-mm) | **WDP**=Water use (WDP)

ADDITIONAL ENVIRONMENTAL IMPACT INDICATORS EN15804+A2

Abbr.	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B6	B7	C1	C2	C3	C4	D
ETP-fw	CTUe	4.84E+0	1.34E-1	1.17E+0	6.14E+0	2.13E-1	4.45E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	3.40E-2	3.81E+0	3.55E-3	-1.25E+0
PM	disease incidence	1.37E-8	6.07E-10	2.73E-9	1.70E-8	1.42E-9	1.47E-8	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	2.27E-10	1.08E-9	2.32E-11	-2.47E-9
	CTUh	1.06E-10	8.45E-12	2.76E-11	1.42E-10	6.89E-12	3.80E-10	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	1.10E-12	5.92E-11	9.32E-14	-1.83E-11

ETP-fw=Ecotoxicity, freshwater (ETP-fw) | **PM**=Particulate Matter (PM) | **HTP-c**=Human toxicity, cancer (HTP-c) | **HTP-nc**=Human toxicity, non-cancer (HTP-nc) | **IR**=Ionising radiation, human health (IR) | **SQP**=Land use (SQP)

5 Results

Abbr.	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B6	B7	C1	C2	C3	C4	D
HTP-c																	
HTP-nc	CTUh	2.94E-9	1.22E-10	7.70E-10	3.83E-9	2.32E-10	5.81E-9	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	3.72E-11	1.21E-9	2.32E-12	5.40E-9
IR	kBq U235 eqv.	7.03E-3	7.83E-4	3.44E-3	1.13E-2	9.99E-4	3.26E-3	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	1.60E-4	9.53E-4	1.31E-5	-7.12E-4
SQP	Pt	1.56E+0	5.92E-2	2.17E+0	3.79E+0	2.07E-1	4.18E-1	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	3.30E-2	8.30E-2	7.90E-3	-9.77E-1

ETP-fw=Ecotoxicity, freshwater (ETP-fw) | **PM**=Particulate Matter (PM) | **HTP-c**=Human toxicity, cancer (HTP-c) | **HTP-nc**=Human toxicity, non-cancer (HTP-nc) | **IR**=Ionising radiation, human health (IR) | **SQP**=Land use (SQP)

CLASSIFICATION OF DISCLAIMERS TO THE DECLARATION OF CORE AND ADDITIONAL ENVIRONMENTAL IMPACT INDICATORS

ILCD classification	Indicator	Disclaimer
ILCD type / level 1	Global warming potential (GWP)	None
	Depletion potential of the stratospheric ozone layer (ODP)	None
	Potential incidence of disease due to PM emissions (PM)	None
	Acidification potential, Accumulated Exceedance (AP)	None
ILCD type / level 2	Eutrophication potential, Fraction of nutrients reaching freshwater end compartment (EP-freshwater)	None
	Eutrophication potential, Fraction of nutrients reaching marine end compartment (EP-marine)	None
	Eutrophication potential, Accumulated Exceedance (EP-terrestrial)	None
	Formation potential of tropospheric ozone (POCP)	None
	Potential Human exposure efficiency relative to U235 (IRP)	1
ILCD type / level 3	Abiotic depletion potential for non-fossil resources (ADP-minerals&metals)	2
	Abiotic depletion potential for fossil resources (ADP-fossil)	2
	Water (user) deprivation potential, deprivation-weighted water consumption (WDP)	2
	Potential Comparative Toxic Unit for ecosystems (ETP-fw)	2

5 Results

ILCD classification	Indicator	Disclaimer
	Potential Comparative Toxic Unit for humans (HTP-c)	2
	Potential Comparative Toxic Unit for humans (HTP-nc)	2
	Potential Soil quality index (SQP)	2

Disclaimer 1 – This impact category deals mainly with the eventual impact of low dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, from radon and from some construction materials is also not measured by this indicator.

Disclaimer 2 – The results of this environmental impact indicator shall be used with care as the uncertainties on these results are high or as there is limited experienced with the indicator.

5.2 INDICATORS DESCRIBING RESOURCE USE AND ENVIRONMENTAL INFORMATION BASED ON LIFE CYCLE INVENTORY (LCI)

PARAMETERS DESCRIBING RESOURCE USE

Abbr.	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B6	B7	C1	C2	C3	C4	D
PERE	MJ	3.76E-1	1.65E-3	2.91E-1	6.69E-1	2.98E-3	9.10E-2	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	4.77E-4	2.37E-2	5.91E-5	-1.67E-1
PERM	MJ	0.00E+0	0.00E+0	1.80E-1	1.80E-1	0.00E+0	5.39E-3	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0
PERT	MJ	3.76E-1	1.65E-3	4.71E-1	8.49E-1	2.98E-3	9.64E-2	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	4.77E-4	2.37E-2	5.91E-5	-1.67E-1
PENRE	MJ	7.36E+0	1.95E-1	1.38E+0	8.94E+0	2.53E-1	1.09E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	4.04E-2	2.46E-1	3.55E-3	-3.64E+0
PENRM	MJ	4.40E+0	0.00E+0	2.98E-1	4.69E+0	0.00E+0	1.41E-1	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	-2.10E-1
PENRT	MJ	1.18E+1	1.95E-1	1.68E+0	1.36E+1	2.53E-1	1.23E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	4.04E-2	2.46E-1	3.55E-3	-3.85E+0
SM	Kg	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	9.37E-3	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0
RSF	MJ	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0
NRSF	MJ	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0
FW	M3	5.55E-3	1.41E-5	1.36E-3	6.93E-3	2.90E-5	1.20E-3	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	4.64E-6	4.52E-4	3.49E-6	-3.95E-4

PERE=renewable primary energy ex. raw materials | **PERM**=renewable primary energy used as raw materials | **PERT**=renewable primary energy total | **PENRE**=non-renewable primary energy ex. raw materials | **PENRM**=non-renewable primary energy used as raw materials | **PENRT**=non-renewable primary energy total | **SM**=use of secondary material | **RSF**=use of renewable secondary fuels | **NRSF**=use of non-renewable secondary fuels | **FW**=use of net fresh water

5 Results

OTHER ENVIRONMENTAL INFORMATION DESCRIBING WASTE CATEGORIES

Abbr.	Unit	A1	A2	A3	A1- A3	A4	A5	B1	B2	B3	B6	B7	C1	C2	C3	C4	D
HWD	Kg	1.59E-6	2.51E-7	9.69E-7	2.81E-6	6.04E-7	3.15E-5	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	9.65E-8	4.44E-7	5.07E-9	-7.24E-6
NHWD	Kg	2.15E-2	3.32E-3	7.26E-3	3.21E-2	1.51E-2	2.46E-2	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	2.42E-3	5.60E-3	1.33E-2	-4.50E-3
RWD	Kg	5.59E-6	1.26E-6	3.69E-6	1.05E-5	1.56E-6	3.03E-6	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	2.50E-7	8.32E-7	1.98E-8	-1.48E-6

HWD=hazardous waste disposed | **NHWD**=non hazardous waste disposed | **RWD**=radioactive waste disposed

ENVIRONMENTAL INFORMATION DESCRIBING OUTPUT FLOWS

Abbr.	Unit	A1	A2	A3	A1- A3	A4	A5	B1	B2	B3	B6	B7	C1	C2	C3	C4	D
CRU	Kg	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0
MFR	Kg	0.00E+0	0.00E+0	1.26E-4	1.26E-4	0.00E+0	3.04E-2	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	6.66E-3	0.00E+0	0.00E+0
MER	Kg	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0
EET	MJ	0.00E+0	0.00E+0	-2.20E-2	-2.20E-2	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	-1.32E+0
EEE	MJ	0.00E+0	0.00E+0	-1.28E-2	-1.28E-2	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	-7.68E-1

CRU=Components for re-use | **MFR**=Materials for recycling | **MER**=Materials for energy recovery | **EET**=Exported Energy Thermic | **EEE**=Exported Energy Electric

5 Results

5.3 INFORMATION ON BIOGENIC CARBON CONTENT PER SQUARE METER

BIOGENIC CARBON CONTENT

The following Information describes the biogenic carbon content in (the main parts of) the product at the factory gate per square meter:


Biogenic carbon content	Amount	Unit
Biogenic carbon content in the product	0	kg C
Biogenic carbon content in accompanying packaging	0.00548	kg C

UPTAKE OF BIOGENIC CARBON DIOXIDE

The following amount of carbon dioxide uptake is taken into account. Related uptake and release of carbon dioxide in downstream processes are not taken into account in this number although they do appear in the presented results. One kilogram of biogenic Carbon content is equivalent to 44/12 kg of biogenic carbon dioxide uptake.

Uptake Biogenic Carbon dioxide	Amount	Unit
Packaging	0.02009	kg CO2 (biogenic)

6 Interpretation of results

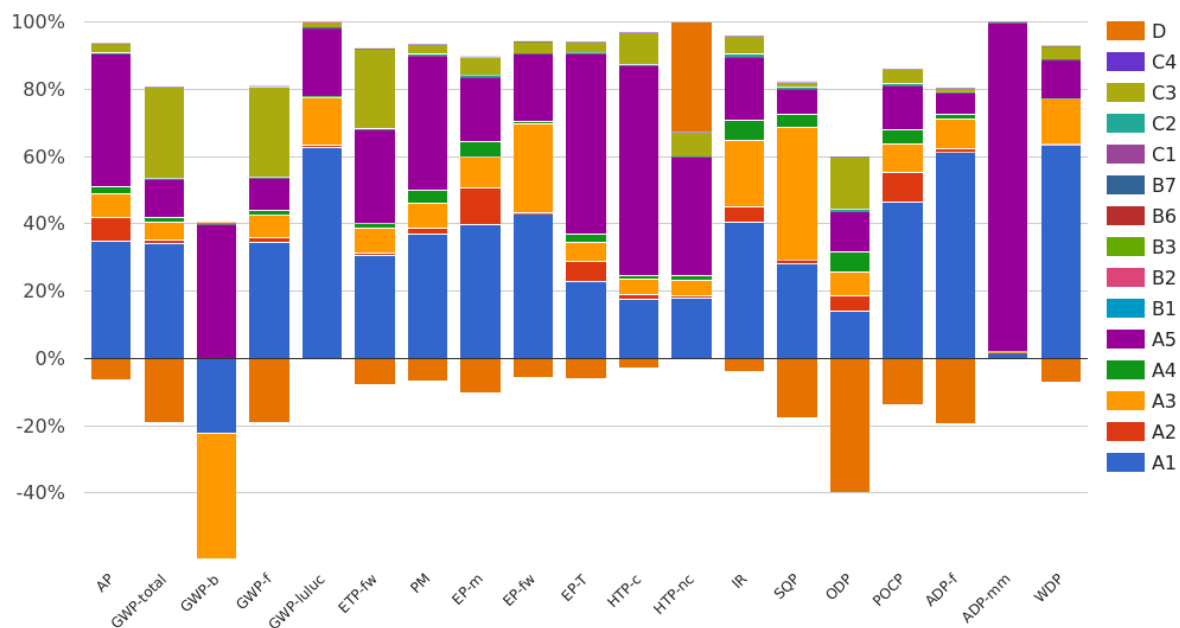

It has been analysed what the contribution is of the modules to the total GWP per functional unit. In the next table it is shown which phase(s) contribute(s) most and how much (the (high) contribution of module A1-A3 is mainly due to module A1 (raw materials)):

Phase/ module	GWP/ m2	share
A1-A3 Production	0.453	66%
A4-5 Construction	0.144	21%
C1-C4 + D End-of-life	0.094	14%
Total	0.69	100%

7 References

ISO 14040

ISO 14040:2006-10, Environmental management - Life cycle assessment - Principles and framework; EN ISO 14040:2006

ISO 14044

ISO 14044:2006-10, Environmental management - Life cycle assessment - Requirements and guidelines; EN ISO 14044:2006

ISO 14025

ISO 14025:2011-10: Environmental labels and declarations — Type III environmental declarations — Principles and procedures

EN 15804+A2

EN 15804+A2: 2019: Sustainability of construction works — Environmental Product Declarations — Core rules for the product category of construction products

General PCR Ecobility Experts

Kiwa-Ecobility Experts (Kiwa-EE) – General Product Category Rules (2022-02-14)

Specific PCR

Product category rules EN 15804 +A2 NPCR 022 Part B for roof waterproofing version 2.0
Issue date: 31.03.2022 Valid to: 06.06.2023 validity extended to 31.12.2024 (PCR EPD Norge)

Backgrounddatabase

Ecoinvent 3.6

8 Contact information

Publisher	Operator	Owner of declaration
		
Kiwa-Ecobility Experts Wattstraße 11-13 13355 Berlin, DE	Kiwa-Ecobility Experts Wattstraße 11-13 13355 Berlin, DE	BMI Group Holdings UK Limited Thames Tower, Station Road, UK RG1 1LX Reading, UK, GB
E-mail: DE.Ecobility.Experts@kiwa.com Website: https://www.kiwa.com/de/en/themes/ecobility-experts/ecobility-experts-epd-program/	E-mail: DE.Ecobility.Experts@kiwa.com Website: https://www.kiwa.com/de/en/themes/ecobility-experts/ecobility-experts-epd-program/	E-mail: info.group@bmigroup.com Website: https://bmigroupinternational.com/

Kiwa-Ecobility Experts is established member of the 