




# Environmental Product Declaration

as per ISO 14025 and EN 15804+A2

|                           |                                      |
|---------------------------|--------------------------------------|
| Owner of the declaration: | Tensar International Limited         |
| Publisher:                | Kiwa-Ecobility Experts               |
| Programme operator:       | Kiwa-Ecobility Experts               |
| Registration number:      | EPD-TENSAR-162-EN (Rev.1_20.05.2022) |
| Issue date:               | 14.12.2021                           |
| Valid to:                 | 14.12.2026                           |

## Tensar® RE520 geogrid

High performance geogrid used for soil reinforcement solutions

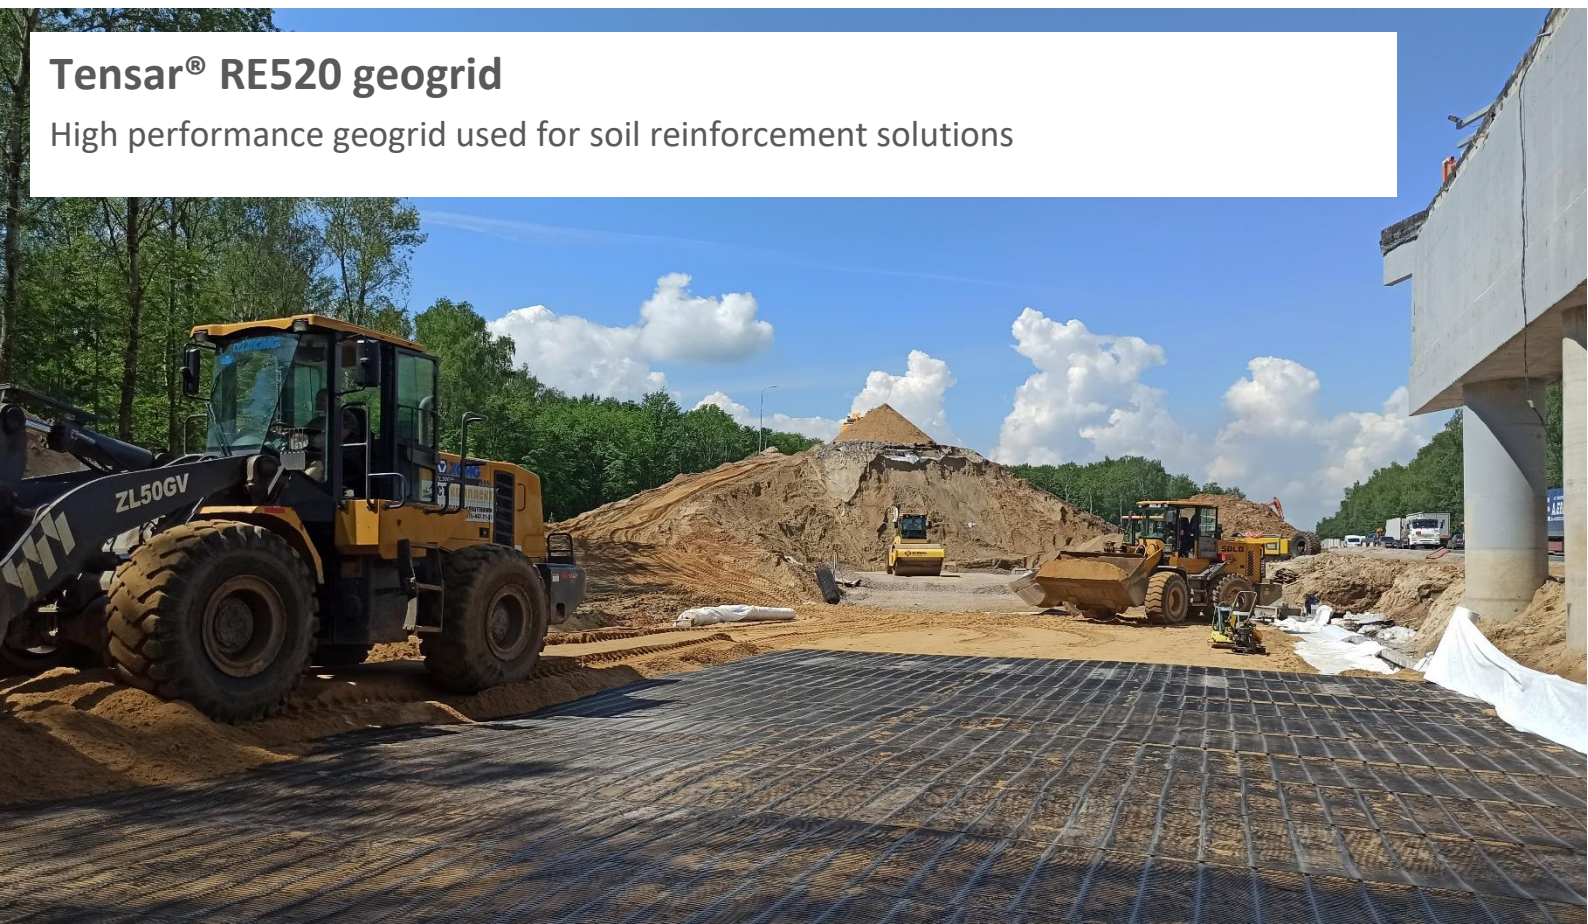

**1. General information**

**Tensor International Limited**

**Programme operator**

Kiwa-Ecobility Experts  
Voltastr. 5  
13355 Berlin  
Germany

**Registration number**

EPD-TENSAR-162-EN (Rev.1\_20.05.2022)

**This declaration is based on the Product Category Rules**

PCR B – Geosynthetic products 2022-02-08 (draft)

**Issue date**

14.12.2021

**Valid to**

14.12.2026



Frank Huppertz  
(Head of Kiwa-Ecobility Experts)



Prof. Dr. Frank Heimbecher  
(Chairman of the independent expert committee –  
Kiwa-Ecobility Experts)

**Tensor<sup>®</sup> RE520**

**Owner of the declaration**

Tensor International Limited  
Units 2-4 Cunningham Court  
Shadsworth Business Park  
Blackburn, United Kingdom

**Declared product / declared unit**

1 m<sup>2</sup> geogrid

**Scope**

Tensor<sup>®</sup> RE520 geogrid is a product of the product series RE500. It is produced and distributed by Tensor International Limited, located in Blackburn (United Kingdom). The EPD refers to the specific product.

EPD type: Cradle to grave with options, and with modules C1-C4 and module D.

Kiwa-Ecobility Experts shall not be liable with respect to manufacturer information, life cycle assessment data and evidence.


**Verification**

The European standard EN 15804+A2:2019 serves as the core PCR.

Independent verification of the declaration and data according to ISO 14025:2011-10

internal

external



Anne Kees Jeeninga - Advieslab V.o.f.  
(Third party verifier)

## 2. Product

### 2.1 Product description

Tensar® RE500 products are uniaxial geogrids made from select grades of high-density polyethylene (HDPE) resins. The polymer structure is highly oriented to resist elongation (creep) under sustained tensile load. The products are resistant to installation damage and chemical and biological long-term degradation.

### 2.2 Application

Tensar® RE500 geogrids are used for the reinforcement of soils in the construction of structures such as retaining walls, bridge abutments, steep slopes, slip repairs, cellular foundation, or basal mattresses.

### 2.3 Technical data

| Name  | Value/Tolerance   | Unit             |
|---|---|------------------|
| Weight of product /TR 041 B.1/  | 360   | g/m <sup>2</sup> |
| Tensile Strength (EN ISO 10319)   | MD – 57,0/-4,2  | kN/m             |
| Elongation at Maximum Load (EN ISO 12236)   | MD – 11,0/ ±3,0   | %                |
| Static Puncture (CBR test) (EN ISO 12236)   | NPD   | kN/m             |
| Dynamic Perforation Resistance (cone drop test) (EN ISO 13433)  | NPD   | mm               |
| Tensile creep (EN ISO 13431)<br>Long term creep rupture strength at a design life of 120 years and 10°C in soil temperature | 27,3  | kN/m             |
| Damage during Installation (EN ISO 10722-1)   | Retained Strength >90/-0  | %                |
| Dangerous substances (National Regulations in force in EU Member States)  | Less than required by national regulations in EU Member States. | -                |
| Specific dimension of the finished rolls (width x length)   | 1.3 x 75  | m                |

### 2.4 Placing on the market/ Application rules

For quality assurance, the geogrids RE500 series are regulated in accordance with European harmonised standards and marked with a CE mark (or UKCA mark for the UK market) by the manufacturer. In the EU/EFTA (excluding Switzerland) the placing of geogrids on the market is covered by Regulation (EU) No. 305/2011 of 9 March 2011. For the product use the respective national provisions shall apply. The product is packed and transported as roll and mainly marketed in Europe.

### 2.5 Base materials / Ancillary materials

Tensar® RE500 geogrids are manufactured from high-density polyethylene (HDPE). HDPE is a thermoplastic polymer known for its high strength-to-density ratio. It belongs to the group of polyolefins and is partially crystalline and nonpolar. It is produced from the monomer ethylene. HDPE has little branching, giving it strong intermolecular forces and high tensile strength.

| Raw material                                      | Unit | Value |
|---|------|-------|
| High-density polyethylene granules/pallets (HDPE) | %    | 100   |


There is no biogenic carbon in the products.

The product is not included in the “Candidate list of substances of very high concern for authorisation” (SVHC).

## 2.6 Manufacturing

The manufacturing is located at Tensar Manufacturing Limited, 2 Sett End Road West, Blackburn, Lancashire, BB1 2PU, United Kingdom. The geogrids are made from HDPE granulate. In the first step granulate is melted and then extruded. After this, the extruded sheet passes the punching process. Depending on the specific product the punches differ in size. The punched sheet is then stretched. The result is the specific obround (uniaxial) structure of each geogrid. The products are rolled and then packaged.

The manufacturing process is shown in the following figure:

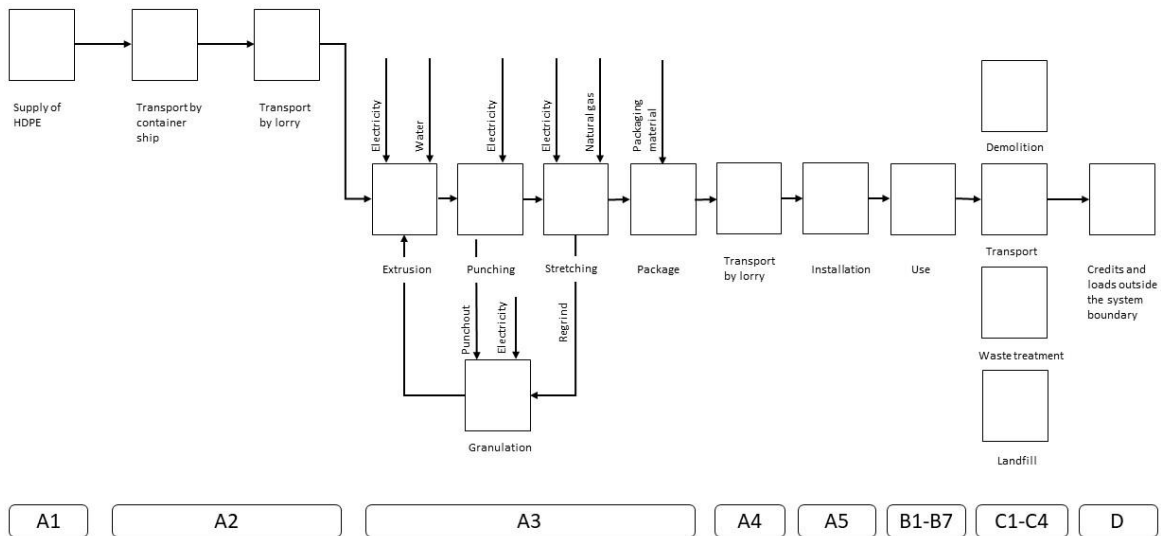

**Figure 1: Process flow chart of the production of Tensar® RE500**

## 2.7 Packaging

Geogrids are rolled and banded twice with PP banding tape.

## 2.8 Reference Service Life (RSL)

The RSL of the soil reinforcement geogrid depends on the service life of the reinforced retaining wall, slope or bridge abutment structure. The RE520 soil reinforcement geogrid is manufactured in accordance with a Quality Management System compliant with BS EN ISO 9001:2008. The reference service life of the product is up to 120 years. Further specification on the RSL of the product can be found in the table below.

| Charakteristic  | Explanation  |
|---|--|
| Durability Statement (EN 13251, Annex B)                    | To be covered within 1 month after installation. Predicted to be durable for up to 100 years in natural soils with $4 \leq \text{pH} \leq 9$ and soil temperatures $\leq 25^\circ\text{C}$ on the basis of the results of test method B.4.2 for 112 days.  |
| Additional Note to Durability Statement (EN 13251, Annex B) | Whilst the durability statement made in the row above is the maximum allowed under the constraints of the relevant CE marking procedures as defined in the appropriate hEN standards and/or EAD, Tensar are confident that no deterioration in properties will occur for a period in excess of 120 years in appropriate soil conditions and would expect no loss of in-situ performance when stored outdoors for a period of 1 year prior to installation. |

## 2.9 Other Information

For further information on RE500 products please visit the official Tensar International Limited webpage under the following link: [www.tensar.co.uk](http://www.tensar.co.uk)

### 3. LCA: Calculation rules

#### 3.1 Declared unit

In accordance with the PCR B 1 m<sup>2</sup> of geogrid is chosen as the declared unit.

| Product                   | Unit                   | Value |
|---------------------------|------------------------|-------|
| Declared Unit             | m <sup>2</sup> geogrid | 1     |
| Unit weight               | g/m <sup>2</sup>       | 379   |
| Conversion factor to 1 kg | -                      | 2.64  |

#### 3.2 System boundary

The Environmental Product Declaration is a complete life cycle with a functional unit. It considers all potential environmental impacts of the product from the cradle to the end of life.

The manufacturing phase includes the production or extraction of the source materials, the transport to the respective production plant and the production of the geotextiles. All inputs (raw materials, precursors, energy and auxiliary materials) as well as the by-products and waste are considered for all life cycle phases. Finally, only production-related energy consumption (excluding administration and social rooms) is considered.

It is assumed that no activities for maintenance, repair, transport and replacement, refurbishment or other material and energy flows take place during the RSL. Modules B1 to B3 are therefore assumed to be zero. Product replacement (B4) and renovation (B5) only apply when the product is considered in a lifespan (of a building, work, etc.). Operational water and energy use are not considered.

The year 2020 represents the time reference for raw materials and electricity consumption. Due to the production location United Kingdom is considered as the geographical reference area. However, environmental effects such as the greenhouse effect can occur with a strong spatial and temporal offset.

The following production steps are considered during the manufacturing phase:

- Extraction and processing of the raw materials (HDPE pre-compounded with UV and anti-oxidant stabiliser packages)
- Transport to the production site
- Processing of the geogrids (extrusion, punching, stretching)
- Packaging (including packaging material)
- End-of-life (including transport)

Secondary fuels are not included in the production process and are therefore not considered. The waste materials and quantities produced are included in the respective modules.

#### 3.3 Estimates and assumptions

Almost all datasets chosen for the LCA refer to the EU as the geographic reference. Transport distances for all raw materials used (raw materials, operating materials, packaging) could be recorded. A payload factor of 50% was used for all truck transports (suppliers, disposal transports and internal transports), which corresponds to a full delivery and empty return trip. A data set for a non-specific truck was used.

The distance to the construction site (A4) was calculated according to the NMD (Nationale Milieu Database (Dutch National Environmental Database)) method. Accordingly, the distance between the production site in Blackburn and Utrecht was considered (900 km). As the mean of transportation truck (unspecified) was chosen.

Tensar International Limited switched in 2020 to a 100% renewable wind energy. According to a wind electricity portal, windbranche.de, 50% of wind power in UK is generated from onshore and 50% from offshore wind parks. Based on this assumption an electricity data set was generated for the LCA calculation. No CO<sub>2</sub> certificates were considered.

### **3.4 Cut-off criteria**

All flows which influence is higher than 1% on the total mass, energy or environmental impact are included in the LCA. It can be assumed that the neglected processes would have contributed less than 5% to the impact categories considered.

All process specific data could be determined and modelled by the use of generic data (EcoInvent 3.6) The HDPE is bulk delivered in 24 tons batches – the pellets are blown into the silo. Therefore, there is no packaging waste for the HDPE.

### **3.5 Period under review**

The production data have been collected for the operating year 2020.

### **3.6 Data quality**

For all processes primary data was collected and provided by Tensar International Limited. The primary data refers to year 2020. For the data, which is not influenced by the manufacturer, generic data was used. The secondary data was taken from the database EcoInvent (version 3.6). The database is maintained on a regular basis and thus meets the requirements of EN 15804 (background data not older than 10 years). The power sources were chosen from data for the UK in 2020, in accordance with the geographical and time representativeness. The data quality is very good, because all process specific data could be documented and modelled by using the generic data.

RETHiNK EPD web application from the company NIBE was used to model the life cycle for the production and disposal of the declared product systems. To ensure that the results are comparable, consistent background data from the international database EcoInvent was used in the LCA (e.g. data records on energy, transport, auxiliary materials, and supplies). Almost all consistent data sets contained in the EcoInvent database are documented and can be viewed online.

### **3.7 Allocation**

Allocations were avoided as far as possible. Tensar uses HDPE for several products as a raw material and all PP residues, which occur during the manufacturing, are recycled. The residues are not mandatorily used again for the product from which they originate. The recycled residues might be used for products from another series.

For example: 5% residues of HDPE occur during the manufacturing of geogrid A. These 5% are recycled, but due to operating conditions, it is possible that 4% is reused for geogrid A and 1% for geogrid B.

For this calculation it was assumed, that the generated punchout and the regrind material of a specific geogrid is reused in a closed loop recycling for the analysed geogrid. This was done to avoid product



specific shifts of potential environmental impacts. It was also assumed that the recycled HDPE substitutes virgin HDPE after a regranulation and that this does not imply any quality losses.

### **3.8 Comparability**

In principle, a comparison or assessment of the environmental impacts of different products is only possible if they have been prepared in accordance with EN 15804. For the evaluation of the comparability, the following aspects have to be considered in particular: PCR used, functional or declared unit, geographical reference, definition of the system boundary, declared modules, data selection (primary or secondary data, background database, data quality), scenarios used for use and disposal phases, and the life cycle inventory (data collection, calculation methods, allocations, validity period). For further guidance see EN 15804+A2 (5.3 Comparability of EPD for construction products).



#### 4. LCA: Scenarios and additional technical information

When installing the soil reinforcement geogrid, it is simply unrolled by hand on prepared layer of reinforced fill (granular/cohesive material) to the required reinforcement length, and then cut, often by use of hand tools. Apart from rolling out, no further installation measures are necessary, which would otherwise be required. RE layers are also installed manually vertically in Tensar Stratum (reinforcement layers) applications. A reject or unused portion of 2-3% of the soil reinforcement geogrid is assumed during the installation process (Module A5).

For C1 the process and amount of the generic dataset 'Polyester weefsel' (EN: polyester fabric) out of chapter 22.46 Grondwapening en grondscheiding (EN: 22.46 Soil reinforcement and soil separation) of the program DuboCalc with database version NMD version 1.8 - 5.01.14052018. In this generic dataset 0.0013 hrs of the process Gr.mach.hydr. (gemiddeld) (EN: Hydraulic excavator (average)) are stated for module C1 (demolition).

For the end-of-life the NMD scenario PE/PP soil reinforcement (geotextile and geogrid) was chosen. This scenario assumes that 25% of the geogrid remains in the subground, 70% are incinerated and 5% are recycled.

Note: The transport distances of the waste are based on the standard waste scenarios of the NMD Determination Method (SBK 2019): incineration 150 km/ recycling 50 km / landfill 100 km; vehicle: truck, unspecified. For energy recovery, it is assumed that only fossil raw materials are substituted, considering the calorific values of the raw materials of the declared product and energy and thermal efficiencies of 18% and 32%. According the EN 15804, loads are credited in A3 or C3 to C4 and benefits are credited in module D.

For all transports, the environmental profile of a non-specific truck transport was used (conservative assumption): The vehicle operates with diesel, and it provides a fleet average that includes different lorry classes as well as EURO classes. This environmental profile contains data for transport, which is calculated for an average load factor, including empty return trips (EcoInvent 3.6).

#### 5. LCA: Results

The following tables show the results of the impact assessment indicators, resource use, waste and other output streams. The results presented here refer to the declared specific product.

Disclaimer on ADP-e, ADP-f, WDP, ETP-fw, HTP-c, HTP-nc, SQP: The results of these environmental impact indicators must be used with caution, as the uncertainties in these results are high or as there is limited experience with the indicator.

Disclaimer on IR: This impact category mainly addresses the potential effect of low dose ionizing radiation on human health in the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents and occupational exposures, nor does it consider radioactive waste disposal in underground facilities. Potential ionizing radiation from soil, radon, and some building materials is also not measured by this indicator.

**Description of the system boundary**

| Product stage       |           |               | Construction process stage                  |                                     | Use stage |             |        |             |              |                        |                       | End of life stage            |           |                  |          | Benefits and loads beyond the system boundaries |
|---------------------|-----------|---------------|---|-------------------------------------|-----------|-------------|--------|-------------|--------------|------------------------|-----------------------|------------------------------|-----------|------------------|----------|---|
| Raw material supply | Transport | Manufacturing | Transport from manufacturer to place of use | Construction - installation process | Use       | Maintenance | Repair | Replacement | Refurbishmen | Operational energy use | Operational water use | De-construction / demolition | Transport | Waste processing | Disposal | Reuse-Recovery-Recycling-potential              |
| A1                  | A2        | A3            | A4  | A5                                  | B1        | B2          | B3     | B4          | B5           | B6                     | B7                    | C1                           | C2        | C3               | C4       | D   |
| X                   | X         | X             | X   | X                                   | X         | X           | X      | MND         | MND          | MND                    | MND                   | X                            | X         | X                | X        | X   |

X=Module declared | MND=Module not declared

**Results of the LCA – Environmental impact: 1 m<sup>2</sup> Tensar® RE520 (EN 15804+A2)**

| Parameter   | Unit                      | A1       | A2       | A3       | A4       | A5       | B1       | B2       | B3       | C1       | C2       | C3       | C4       | D         |  |
|---|---------------------------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|-----------|--|
| <b>Core environmental impact indicators (EN 15804+A2/NMD set 2)</b>       |                           |          |          |          |          |          |          |          |          |          |          |          |          |           |  |
| ADP-mm  | kg Sb-eqv.                | 6,80E-06 | 1,40E-06 | 1,02E-06 | 1,17E-06 | 3,44E-07 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 1,04E-07 | 1,39E-07 | 9,13E-07 | 1,08E-08 | -4,64E-07 |  |
| ADP-f   | MJ                        | 2,68E+01 | 4,44E-01 | 4,92E+00 | 6,94E-01 | 1,01E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 9,37E-01 | 8,29E-02 | 5,55E-01 | 2,38E-02 | -8,55E+00 |  |
| AP  | mol H <sup>+</sup> eqv.   | 2,73E-03 | 1,47E-04 | 4,70E-04 | 2,67E-04 | 1,19E-04 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 7,12E-04 | 3,19E-05 | 3,21E-04 | 8,76E-06 | -4,91E-04 |  |
| EP-fw   | kg PO <sub>4</sub> eqv.   | 1,29E-05 | 3,25E-07 | 7,07E-06 | 4,64E-07 | 6,90E-07 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 2,48E-07 | 5,55E-08 | 2,14E-06 | 1,80E-08 | -1,13E-06 |  |
| EP-m  | kg N eqv.                 | 4,67E-04 | 2,92E-05 | 1,05E-04 | 9,41E-05 | 2,41E-05 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 3,14E-04 | 1,12E-05 | 8,77E-05 | 5,31E-06 | -1,29E-04 |  |
| EP-t  | mol N eqv.                | 5,20E-03 | 3,28E-04 | 1,15E-03 | 1,04E-03 | 2,66E-04 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 3,45E-03 | 1,24E-04 | 9,77E-04 | 3,22E-05 | -1,42E-03 |  |
| GWP-b   | kg CO <sub>2</sub> eqv.   | 3,96E-03 | 1,17E-05 | 1,81E-04 | 2,13E-05 | 1,29E-04 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 1,89E-05 | 2,54E-06 | 1,03E-04 | 1,08E-05 | -3,16E-04 |  |
| GWP-f   | kg CO <sub>2</sub> eqv.   | 7,59E-01 | 3,02E-02 | 3,12E-01 | 4,60E-02 | 5,66E-02 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 6,81E-02 | 5,50E-03 | 7,12E-01 | 1,41E-02 | -4,68E-01 |  |
| GWP-luluc   | kg CO <sub>2</sub> eqv.   | 2,32E-04 | 1,75E-05 | 3,72E-05 | 1,69E-05 | 1,10E-05 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 5,37E-06 | 2,01E-06 | 5,78E-05 | 4,97E-07 | -2,42E-05 |  |
| GWP-total   | kg CO <sub>2</sub> eqv.   | 7,64E-01 | 3,03E-02 | 3,12E-01 | 4,61E-02 | 5,68E-02 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 6,81E-02 | 5,50E-03 | 7,12E-01 | 1,41E-02 | -4,68E-01 |  |
| ODP   | kg CFC 11 eqv.            | 1,93E-08 | 6,44E-09 | 4,02E-08 | 1,02E-08 | 3,01E-09 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 1,47E-08 | 1,21E-09 | 2,18E-08 | 3,11E-10 | -5,68E-08 |  |
| POCP  | kg NMVOC eqv.             | 2,54E-03 | 1,06E-04 | 4,03E-04 | 2,96E-04 | 1,10E-04 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 9,49E-04 | 3,54E-05 | 2,63E-04 | 1,23E-05 | -5,13E-04 |  |
| WDP   | m <sup>3</sup> world eqv. | 6,09E-01 | 1,53E-03 | 2,81E-01 | 2,48E-03 | 2,80E-02 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 1,26E-03 | 2,97E-04 | 3,63E-02 | 1,02E-03 | -6,26E-02 |  |
| <b>Additional environmental impact indicators (EN 15804+A2/NMD set 2)</b> |                           |          |          |          |          |          |          |          |          |          |          |          |          |           |  |
| ETP-fw  | CTUe                      | 4,25E+00 | 3,99E-01 | 1,49E+00 | 6,19E-01 | 4,78E-01 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 5,65E-01 | 7,39E-02 | 8,95E+00 | 2,53E-02 | -6,34E-01 |  |
| HTP-c   | CTUh                      | 2,00E-10 | 1,46E-11 | 1,93E-10 | 2,01E-11 | 1,71E-11 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 1,97E-11 | 2,40E-12 | 1,36E-10 | 6,64E-13 | -3,73E-11 |  |
| HTP-nc  | CTUh                      | 4,65E-09 | 3,94E-10 | 2,28E-09 | 6,77E-10 | 3,29E-10 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 4,85E-10 | 8,09E-11 | 2,83E-09 | 1,65E-11 | -6,22E-10 |  |
| IRP   | kBq U235 eqv.             | 1,79E-02 | 1,94E-03 | 3,27E-03 | 2,91E-03 | 8,63E-04 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 4,02E-03 | 3,47E-04 | 2,27E-03 | 9,31E-05 | -3,23E-03 |  |
| PM  | disease incidence         | 2,26E-08 | 1,39E-09 | 3,54E-09 | 4,14E-09 | 1,05E-09 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 1,89E-08 | 4,95E-10 | 2,60E-09 | 1,65E-10 | -2,16E-09 |  |
| SQP   |                           | 8,76E-01 | 2,09E-01 | 4,47E-01 | 6,02E-01 | 7,41E-02 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 1,20E-01 | 7,19E-02 | 2,04E-01 | 5,62E-02 | -1,48E-01 |  |

ADP-mm=Depletion of abiotic resources-minerals and metals | ADP-f=Depletion of abiotic resources-fossil fuels | AP=Acidification of soil and water | EP-fw =Eutrophication, freshwater | EP-m=Eutrophication marine | EP-T=Eutrophication, terrestrial | GWP-b=Global warming potential - Biogenic | GWP-f=Global warming potential - Fossil | GWP-luluc=Global warming potential - Land use and land use change | GWP-total=Global warming potential | ODP=Ozone layer depletion | POCP=Photochemical oxidants creation | WDP=Water use | ETP-fw=Ecotoxicity, freshwater | HTP-c=Human toxicity, cancer | HTP-nc=Human toxicity, non-cancer | IRP=Ionising radiation, human health | PM=Particulate Matter | SQP=Land use

**Results of the LCA – Resource use and environmental information: 1 m<sup>2</sup> Tensor® RE520 (EN 15804+A2)**

| Parameter | Unit | A1       | A2       | A3       | A4       | A5       | B1       | B2       | B3       | C1       | C2       | C3       | C4       | D         |
|-----------|------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|-----------|
| PERE      | MJ   | 4,50E-01 | 9,12E-03 | 9,03E+00 | 8,69E-03 | 2,87E-01 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 5,07E-03 | 1,04E-03 | 5,61E-02 | 4,21E-04 | -3,84E-02 |
| PERM      | MJ   | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00  |
| PERT      | MJ   | 4,50E-01 | 9,12E-03 | 9,03E+00 | 8,69E-03 | 2,87E-01 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 5,07E-03 | 1,04E-03 | 5,61E-02 | 4,21E-04 | -3,84E-02 |
| PENRE     | MJ   | 1,45E+01 | 4,71E-01 | 5,29E+00 | 7,37E-01 | 6,55E-01 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 9,95E-01 | 8,80E-02 | 5,89E-01 | 2,53E-02 | -8,70E+00 |
| PENRM     | MJ   | 1,43E+01 | 0,00E+00 | 1,36E-01 | 0,00E+00 | 4,32E-01 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | -7,35E-01 |
| PENRT     | MJ   | 2,88E+01 | 4,71E-01 | 5,43E+00 | 7,37E-01 | 1,09E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 9,95E-01 | 8,80E-02 | 5,89E-01 | 2,53E-02 | -9,43E+00 |
| SM        | Kg   | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00  |
| RSF       | MJ   | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00  |
| NRSF      | MJ   | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00  |
| FW        | M3   | 9,19E-03 | 6,06E-05 | 6,62E-03 | 8,46E-05 | 5,12E-04 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 4,83E-05 | 1,01E-05 | 1,07E-03 | 2,48E-05 | -8,87E-04 |
| HWD       | Kg   | 3,25E-06 | 1,18E-06 | 8,35E-06 | 1,76E-06 | 4,78E-07 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 2,55E-06 | 2,10E-07 | 1,06E-06 | 3,61E-08 | -9,24E-06 |
| NHWD      | Kg   | 2,41E-02 | 1,27E-02 | 3,38E-02 | 4,40E-02 | 6,86E-03 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 1,11E-03 | 5,26E-03 | 1,37E-02 | 9,50E-02 | -4,12E-03 |
| RWD       | Kg   | 1,60E-05 | 2,95E-06 | 4,14E-06 | 4,56E-06 | 9,10E-07 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 6,51E-06 | 5,45E-07 | 1,99E-06 | 1,41E-07 | -4,25E-06 |
| CRU       | Kg   | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00  |
| MFR       | Kg   | 0,00E+00 | 0,00E+00 | 1,90E-04 | 0,00E+00 | 5,76E-04 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 1,90E-02 | 0,00E+00 | 0,00E+00  |
| MER       | Kg   | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00  |
| EE        | MJ   | 0,00E+00 | 0,00E+00 | 4,89E-02 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 5,04E+00  |

PERE=renewable primary energy ex. raw materials | PERM=renewable primary energy used as raw materials | PERT=renewable primary energy total | PENRE=non-renewable primary energy ex. raw materials | PENRM=non-renewable primary energy used as raw materials | PENRT=non-renewable primary energy total | SM=use of secondary material | RSF=use of renewable secondary fuels | NRSF=use of non-renewable secondary fuels | FW=use of net fresh water | HWD=hazardous waste disposed | NHWD=non-hazardous waste disposed | RWD=radioactive waste disposed | CRU=Components for re-use | MFR=Materials for recycling | MER=Materials for energy recovery | EE=Exported energy


**Results of the LCA – Environmental impact, optional: 1 m<sup>2</sup> Tensor® RE520 (set 1 of the NMD determination method (version 1.0; July 2020))**

| Parameter | Unit                                  | A1       | A2       | A3       | A4       | A5       | B1       | B2       | B3       | C1       | C2       | C3       | C4       | D         |
|-----------|---------------------------------------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|-----------|
| ADP-e     | Kg Sb                                 | 6,80E-06 | 1,40E-06 | 1,02E-06 | 1,17E-06 | 3,44E-07 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 1,04E-07 | 1,39E-07 | 9,13E-07 | 1,08E-08 | -4,64E-07 |
| ADP-f     | Kg Sb                                 | 1,28E-02 | 2,11E-04 | 2,64E-03 | 3,36E-04 | 4,90E-04 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 4,45E-04 | 4,01E-05 | 2,95E-04 | 1,16E-05 | -4,54E-03 |
| GWP       | Kg CO <sub>2</sub> eqv.               | 7,30E-01 | 3,00E-02 | 3,08E-01 | 4,57E-02 | 5,55E-02 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 6,74E-02 | 5,45E-03 | 7,11E-01 | 1,20E-02 | -4,61E-01 |
| ODP       | Kg CFC-11 eqv.                        | 2,02E-08 | 5,17E-09 | 3,55E-08 | 8,10E-09 | 2,78E-09 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 1,17E-08 | 9,67E-10 | 2,18E-08 | 2,48E-10 | -5,02E-08 |
| POCP      | Kg Ethene eqv.                        | 6,95E-04 | 1,63E-05 | 7,59E-05 | 2,75E-05 | 2,54E-05 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 6,86E-05 | 3,29E-06 | 2,54E-05 | 2,72E-06 | -9,55E-05 |
| AP        | Kg SO <sub>2</sub> eqv.               | 2,27E-03 | 1,20E-04 | 3,80E-04 | 2,01E-04 | 9,78E-05 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 5,08E-04 | 2,40E-05 | 2,50E-04 | 6,66E-06 | -3,90E-04 |
| EP        | Kg PO <sub>4</sub> <sup>3-</sup> eqv. | 2,12E-04 | 1,51E-05 | 6,15E-05 | 3,94E-05 | 1,13E-05 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 1,15E-04 | 4,71E-06 | 4,07E-05 | 2,68E-06 | -5,04E-05 |
| HTP       | kg 1.4 DB                             | 1,19E-01 | 1,10E-02 | 1,18E-01 | 1,92E-02 | 9,69E-03 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 2,50E-02 | 2,30E-03 | 5,18E-02 | 9,84E-04 | -2,80E-02 |
| FAETP     | kg 1.4 DB                             | 2,23E-03 | 2,84E-04 | 8,31E-04 | 5,61E-04 | 2,30E-04 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 3,47E-04 | 6,70E-05 | 2,66E-03 | 1,02E-03 | -3,36E-04 |
| MAETP     | kg 1.4 DB                             | 7,17E+00 | 1,06E+00 | 2,30E+00 | 2,02E+00 | 6,49E-01 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 1,21E+00 | 2,41E-01 | 7,75E+00 | 1,02E+00 | -1,36E+00 |
| TETP      | kg 1.4 DB                             | 4,71E-04 | 4,73E-05 | 3,89E-04 | 6,79E-05 | 3,36E-05 | 0,00E+00 | 0,00E+00 | 0,00E+00 | 4,11E-05 | 8,11E-06 | 1,33E-04 | 1,70E-06 | -9,29E-05 |

ADP-e=Depletion of abiotic resources - elements | ADP-f=Depletion of abiotic resources - fossil fuels | GWP=Global warming potential | ODP=Ozone layer depletion | POCP=Photochemical oxidants creation | AP=Acidification of soil and water | EP=Eutrophication | HTP=Human toxicity | FAETP=Ecotoxicity fresh water | MAETP=Ecotoxicity marine water | TETP=Ecotoxicity terrestrial

**6. LCA: Interpretation**

As shown in the figure below, raw material supply (A1) dominates in most environmental core indicators, often followed by the production process (A3). In some environmental core indicators demolition phase (C1) has a great impact. However, C1 is strongly dependent on the assumption (here diesel consumption of a construction site vehicle). The highest influence on the Global Warming Potential have raw material supply (A1), waste processing (C3), and production process (A3). Transports (A2, A4, C2) have rather a minor impact within all core indicators.

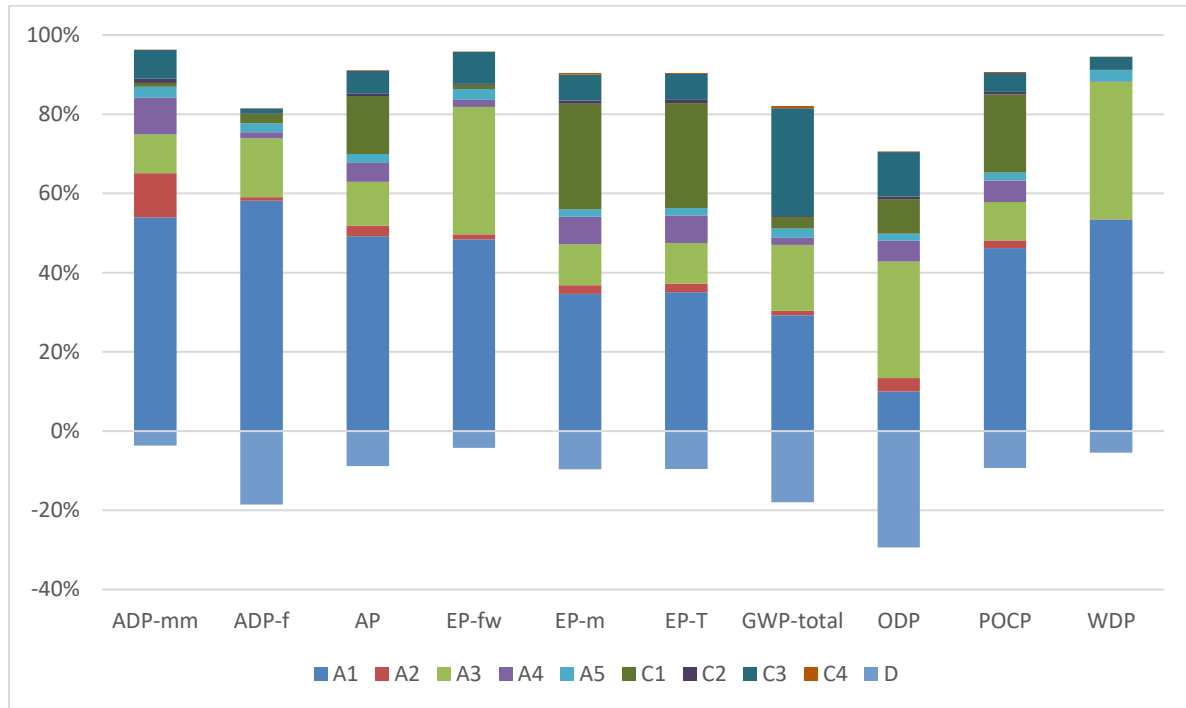

**Figure 2: Tensor® RE520 - Impact of the individual modules on the environmental core indicators**

The MKI (Dutch: Milieukostenindicator) value calculated based on set 1 of the NMD determination method amounts to 0.129.

The data quality can be classified as good overall. All relevant process-specific data could be collected in the operational data collection. Consistent data sets from the EcoInvent database were available for almost all inputs and outputs. The background data meet the requirements of EN 15804, and the production data were recorded for the 2020 operating year. The quantities of raw materials and supplies used as well as energy consumption were recorded for the entire operating year.



## 7. Requisite evidence

In 2020, RE570 was tested concerning its leaching behavior using the trough method. Due to this method the institute "Prüftechnik Z+L" could determine the direct environmental impacts to the local environment (soil and groundwater). In accordance with the criteria of the German Federal Soil Protection and Contaminated Sites Ordinance (Bundesbodenschutz- und Altlastenverordnung) the environmental soundness of the geogrid could be confirmed. This result can be transferred to all the other types of geogrids referring to the product series RE500, and therefore to the RE520.

## 8. References

CML-IA April 2013 – Charakterisierungsfaktoren entwickelt durch Institut of Environmental Sciences (CML): Universität Leiden, Niederlande - <http://www.cml.leiden.edu/software/data-cmlia.html>

Donndorf, R., Kahle H., Müller, G., Philipp H-J., Taschow, H-J., Wolf, O. (1973): Werkstoffeinsatz und Korrosionsschutz in der chemischen Industrie. VEB Deutscher Verlag für Grundstoffindustrie Leipzig.

European Commission Joint Research Centre Institute for Prospective Technological Studies (JCR 2014): End-of-waste criteria for waste plastic for conversion, Seville, 2014, doi:10.2791/13033

Klöpffer, W., Grahl B.: Ökobilanz (LCA) – Ein Leitfaden für die Ausbildung und Beruf, Wily-VCH Verlag, Weinheim, 2007

Rosauer, V. (2010): Abschätzung der herstellungsbedingten Qualität und Lebensdauer von Asphalt-deckschichten mit Hilfe der Risikoanalyse (Estimation of the production-related quality and service life of asphalt wearing courses with the aid of risk analysis). Technischen Universität Darmstadt, 2010

Stichting Bouwkwaliiteit (SBK) – Foundation for Building Quality; “Determination Method: Environmental Performance of Buildings and Civil Engineering Works”

Stichting Nationale Milieudatabase; Bepalingsmethode Milieuprestatie Bouwwerken; Version 1.0; July 2020; Berekeningswijze voor het bepalen van de milieuprestatie van bouwwerken gedurende hun gehele levensduur, gebaseerd op de EN 15804.

Windbranche.de – Das Branchenportal rund um die Windenergie. Wind power and electricity generation in Great Britain: <https://www.windbranche.de/wind/windstrom/windenergie-grossbritannien>, last accessed 19 July 2021.

### Standards and laws

ISO 14040:2006, Environmental management - Life cycle assessment - Principles and framework

ISO 14044:2006, Environmental management - Life cycle assessment - Requirements and guide-lines

ISO 14025:2006: Environmental labels and declarations — Type III environmental declarations — Principles and procedures EN 13249

EN 15804:2012+A2:2019 Sustainability of construction works — Environmental Product Declarations — Core rules for the product category of construction products

PCR A: General Program Category Rules for Construction Products from the EPD program Kiwa-Ecobility Experts, R.O\_2021-07-16

PCR B: Product Category Rules (PCR) from the Kiwa-Ecobility Experts EPD program: “Geosynthetic products”, edition 2022-02-08 (draft)

|   |   |  |  |
|---|---|--|--|
|  | <p><b>Publisher</b><br/>         Kiwa-Ecobility Experts<br/>         Voltastr. 5<br/>         13355 Berlin<br/>         Germany</p>   | <p>Mail<br/>         Web</p>                                     | <p><a href="mailto:DE.Ecobility.Experts@kiwa.com">DE.Ecobility.Experts@kiwa.com</a><br/> <a href="https://www.kiwa.com/de/de/themes/ecobility-experts/ecobility-experts/">https://www.kiwa.com/de/de/themes/ecobility-experts/ecobility-experts/</a></p> |
|  | <p><b>Programme operator</b><br/>         Kiwa-Ecobility Experts<br/>         Voltastr. 5<br/>         13355 Berlin<br/>         Germany</p>  | <p>Mail<br/>         Web</p>                                     | <p><a href="mailto:DE.Ecobility.Experts@kiwa.com">DE.Ecobility.Experts@kiwa.com</a><br/> <a href="https://www.kiwa.com/de/de/themes/ecobility-experts/ecobility-experts/">https://www.kiwa.com/de/de/themes/ecobility-experts/ecobility-experts/</a></p> |
|  | <p><b>Author of the Life Cycle Assessment</b><br/>         Kiwa GmbH<br/>         Voltastr.5<br/>         13355 Berlin<br/>         Germany</p>   | <p>Tel.<br/>         Fax.<br/>         Mail<br/>         Web</p> | <p>+49 (0) 30 467761-43<br/>         +49 (0) 30 467761-10<br/> <a href="mailto:DE.Nachhaltigkeit@kiwa.com">DE.Nachhaltigkeit@kiwa.com</a><br/> <a href="https://www.kiwa.com/">https://www.kiwa.com/</a></p>   |
|  | <p><b>Owner of the declaration</b><br/>         Tensar International Limited<br/>         Units 2-4 Cunningham Court<br/>         Shadsworth Business Park<br/>         Blackburn, United Kingdom</p> | <p>Tel.<br/>         Fax.<br/>         Mail<br/>         Web</p> | <p>+44 (0) 1254 262 431<br/>         +44 (0) 1254 266 867<br/> <a href="mailto:info@tensar-international.com">info@tensar-international.com</a><br/> <a href="http://www.tensar.co.uk">www.tensar.co.uk</a></p>  |