



Environmental Product Declaration

as per ISO 14025 and EN 15804 +A1

Owner of the declaration:	Miniera San Romedio Srl
Publisher:	Kiwa BCS Öko-Garantie GmbH - Ecobility Experts
Programme holder:	Kiwa BCS Öko-Garantie GmbH - Ecobility Experts
Declaration number:	EPD-Miniera San Romedio Srl-87-EN
Issue date:	20.07.2020
Valid to:	19.07.2025

NHL based plaster

(Latemar, TD13N, TD13M, TD13MEC, TD13PF, TD13PA, TD13DRY Rin, TD13DRY SOFT, TD13S)

This EPD is based on a Life Cycle Assessment (LCA) study of a natural hydraulic lime (NHL) based premixed product produced by Miniera San Romedio Srl in its plants in the province of Trento (Italy). The premixed Miniera San Romedio's products are inorganic finely grinded materials, obtained by means of the combinations at different relative concentrations of natural hydraulic lime, acting as the inorganic binder, and the fillers (i.e. dolomia, expanded perlite). NHL based plaster is a ready-to-use product, designed for the improvement of living healthiness and comfort, thanks to its particular composition based on only natural elements.

1. General information

Miniera San Romedio Srl

Programme holder

Kiwa BCS Öko-Garantie GmbH
- Ecobility Experts
Marientorbogen 3-5
90402 Nürnberg (Germany)

Declaration number

EPD-Miniera San Romedio Srl-87-EN

This declaration is based on the Product
Category Rules


UNI EN 16908

Issue date

20.07.2020

Valid to

19.07.2025



Signature

Frank Huppertz
(President of Kiwa BCS Öko-Garantie GmbH – Ecobility Experts GmbH)



Signature

Prof. Dr. Frank Heimbecher
(Chairman of the independent expert committee BCS Öko-Garantie GmbH – Ecobility Experts GmbH)

NHL based plaster

Owner of the declaration

Miniera San Romedio Srl
Località alla Miniera 38012 Predaia (TN) – Italy
VAT Number 00602230229

Declared product / declared unit

1 ton (1000 kg) of Natural Hydraulic Lime (NHL) based premixed product

Scope

This EPD refers to a natural hydraulic lime (NHL) based premixed product produced by Miniera San Romedio Srl in its plants in the province of Trento (Italy).

The data used to perform the LCA analysis were provided by Miniera San Romedio Srl and referred to the production of one year, and the information are relative to the period 2017-2018. This EPD is intended to be used for business-to-consumer communications. The owner of the declaration is liable for the underlying information and evidence.

Kiwa BCS Öko-Garantie GmbH – Ecobility Experts shall not be liable with respect to manufacturer information, life cycle assessment data and evidences.


Verification

The CEN Norm EN 15804:2012+A1:2013 serves as the core PCR.

Independent verification of the declaration and data according to ISO 14025:2011-10

internally

externally

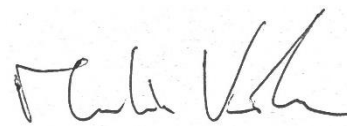

Signature

Martin Köhrer
(External verifier of Kiwa GmbH)

2. Product

2.1 Product description

The premixed Miniera San Romedio's products are inorganic finely grinded materials, obtained by means of the combinations at different relative concentrations of natural hydraulic lime, acting as the inorganic binder, and the fillers (i.e. dolomia, expanded perlite). The product family considered in this EPD is the NHL based plaster, belonging to the line Puro Comfort® (Latemar) and the line HD System® (TD13N, TD13M, TD13MEC, TD13PF, TD13PA, TD13DRY Rin, TD13DRY SOFT, TD13S).

2.2 Application

The NHL based plaster is a ready-to-use product, designed for the improvement of living healthiness and comfort, thanks to its particular composition based on only natural elements.

2.3 Technical Data

In Table 1 the main physical and applicative properties of the considered product are reported.

Table 1: Physical and applicative properties of the NHL based plaster.

Name	Value	Unit
Binder classification (UNI EN 459-1)	NHL 5	-
Granulometry	(F) 0-0.5, (M) 0-1, 0-2, (G) 0-4	mm
Yield	(F) 3, (M) 4, (G) 5	kg/m ²
Water vapor resistance	10-15	-
pH-value	> 10.5	-
Fire reaction class	A1	-

2.4 Placing on the market / Application rules

Accordingly to UNI EN 459-1:2010 ("Building lime - Part 1: Definitions, specifications and conformity criteria"), it is classified as NHL5 and subject to CE marking according to current legislation. The premixed Miniera San Romedio's products are powder or granulates and therefore they have to be transported to the building site by using 25 kg to 30 kg paper bags, collected over a pallet. Pellets range from 50 to 60 bags each one, and can be mechanically moved. Once the product reaches the building site the bags can be used to mix the product with the specified amount of water and either be manually stirred or mechanically mixed. Plasters can be also transported to the construction site unpackaged and directly pumped into a silo already settled on a nearby position.

2.5 Base materials / Ancillary materials

The premixed Miniera San Romedio's products are obtained by means of the combinations at different relative concentrations of natural hydraulic lime, acting as the inorganic binder, and the fillers (dolomia, expanded perlite). Water and small amounts of additives (less than 3 wt%) are necessarily added to the mix, in order to develop innovative materials with very peculiar properties and suitable for a wide range of applications in the constructions field. The relative composition of the NHL based plaster analyzed in the present EPD is summarized in Table 2.

Table 2: Composition of the NHL based plaster, as declared by Miniera San Romedio Srl.

Product	Dolomia [wt%]	Expanded perlite [wt%]	NHL* [wt%]	Additives [wt%]
NHL based plaster	80-85	-	15-20	<1

* Comprising setting retardant (4 wt% of the total NHL content)

2.6 Manufacture

- Manufacturing process of the Binder (Natural Hydraulic Lime)

The unprocessed marlstone is extracted from the pit in Predaia (TN), through a mixed explosive. The obtained marlstone is then collected through a Diesel bulldozer and transported with a Diesel lorry from Predaia (TN) to the Ville d'Anaunia (TN) facility, where the material is subjected to a first crushing. After the first crushing of the marlstone, part of this material is used as corrective and it is not crushed anymore, but it is transported into a specific hopper. Through a conveyor belt the crushed marlstone that is not intended to be used as corrective is then transported to the cooking plant, fed with hard coal. In the cooking plant the material is subjected to a slow thermal treatment at 900-1200 °C, that can last up to 48 hours, and the treated material is then transported through a conveyor belt in the maturation hopper. After the thermal treatment, the material is then subjected to a first and a second milling phase, in order to reach the required granulometry. The lime based end product (i.e. the binder) is obtained mixing the milled lime, the setting retardant and the corrective marlstone (i.e. the marlstone extracted from the pit of Predaia, transported to the cooking plant, milled and not subjected to the thermal treatment).

- Manufacturing of the Dolomia inert

The Dolomia is extracted in Rio Maggiore pit (TN), by using perforation holes produced by a perforating machine, and filled with explosive. Water is used to decant the powder produced by the explosion, and also the pit ventilation system is utilized during the perforations. The extracted dolomia is collected through a Diesel bulldozer. A natural gas drier is used to dry the extracted dolomia, and with a Diesel lorry the collected inert is transported outside the pit. The inert is then subjected to a first crushing operation outside the pit, by using a Hazemag mill. The resulting material is then transported to a conveyor belt in Mollaro (TN) facility and a further reduction of the size can be obtained through a second crushing, performed through a hammer mill.

- Manufacturing of the lime based premixed products

The lime used in the premixed products as binder is loaded on a truck and transported from the Ville d'Anaunia (TN) plant to the Mollaro (TN) facility, and put in a cisterns. The crushed dolomia can be added with the binder in the right relative proportions (see Table 2). The mixing operations are performed in the plant of Mollaro (TN). The mixed powders are then packed through a bagging system, by using a paper bag with capacity of 25 kg to 30 kg, palletized and then directly distributed.

2.7 Reference Service Life

According EN 15804 +A1 and UNI EN 16908 standards, the reference service life (RSL) of this product does not have to be declared, because this EPD is based on a "cradle to gate" approach, it considers only the A1-A3 phases, and it does not declare the entire life cycle.

3. LCA: Calculation rules

3.1 Declared unit

The LCA study was performed on the declared unit of 1 ton (1000 kg) of NHL based pre-mixed product. The choice of the declared unit was performed according to the EN 15804 +A1 and UNI EN 16908 standards.

3.2 System boundary

According to the EN 15804 +A1 standard, this study considers a “cradle-to-gate” analysis (stages A1-A3), covering the following stages:

- Extraction and processing of the raw materials (A1)
- Transport of the acquired raw materials to the manufacturer and internal transport of the extracted raw materials (A2)
- Production of the materials and mixing operations (A3).

Therefore, the phases related to the transport to the site (A4), the on-site processes (A5), to the use stage (B1-B7) and the end of life stages (C1-C4) were not taken into account. Also, the benefits beyond the system boundaries (D) were not considered.

The internal transportations from one working site to another were considered, as well as the transport of the raw materials purchased from other companies. For all the considered life cycle phases, the provision of all materials, products and energy as well as the complete waste treatment up to the end of the waste status or disposal of residual waste were considered.

The main types of generated waste in this process could be powder waste, paper (paper bags) and foil. Also waste oil (maintenance) and wood (pallets) could be present. All these waste types, if present, are separated, stored and redirected to the recycling circuit or disposed of. However, according to the information provided by Miniera San Romedio Srl, all the extracted material can be processed without any appreciable loss of product. Also in the production phase the losses of powder and of packaging materials are negligible. Moreover, the production of the pre-mixed products is completely performed by using virgin raw materials, without the use and/or the recovery of recycled products. In the analyzed system also secondary fuels are absent.

3.3 Estimates and assumptions

The electrical energy consumed in Miniera San Romedio Srl plants is a fully renewable certified energy. The 100% of the electrical energy comes from renewable energy sources (hydro-electric plants). The electrical energy is converted from the high voltage to low voltage using an electrical transformer located close to the plants. The certification of the renewability of the energy covers to whole period analyzed in this study (2017-2018) and is still valid. For as concerns the energy source to feed the furnace for the NHL production, hard coal, with a total heat evolution of 787 Mcal to cook 1 ton of NHL, was considered. For the internal transportations, gasoline with a calorific power of 45 MJ/kg was considered.

In this work, allocations have been avoided as far as possible (e.g. by system expansion, splitting processes into sub-processes). Where it was necessary, an economical allocation principle was utilized. This choice was performed because the economic difference between product and co-products was rather elevated. A peculiar feature of the dolomia cave in Rio Maggiore (TN) is that the extraction of the inert is performed for two interconnected purposes: obtaining the inerts to be mixed with the NHL in the premixed products of Miniera San Romedio, and creating the spaces to store the apples produced in Trentino by Melinda Spa company. Because of this reason, the extraction of the Dolomia from the pit of Rio Maggiore is subjected to a specific mineralogical design which takes into account the development of large chambers for the storage of the apples produced by Melinda Spa. The necessity to apply a different mineralogical excavation technique, very far from the optimized mining technique traditionally used for the extraction of the inerts, involves a larger demand of energy and explosive. Compared to the traditional mining technique, this implies a surplus of the mining costs of the 79% for Miniera San Romedio Srl company.

Considering that the economical values of the products of Miniera San Romedio Srl (i.e. inerts for pre-mixed products) and Melinda Spa (i.e. stored apples) are completely different, an economical allocation principle was applied to partition the environmental load associated to the Dolomia mining operations. Therefore, in this study only the 21% of the environmental impact coming from the extraction of the Dolomia has been attributed to Miniera San Romedio Srl, following an economical allocation principle, while the remaining part was considered as an input of the LCA system of Melinda Spa. On the other hand, all the operations related to the subsequent crushing and transportation of Dolomia have been fully attributed to the present system, as the extracted Dolomia is fully utilized by Miniera San Romedio Srl as inert material for the preparation of pre-mixed products.

3.4 Cut-off criteria

As reported in the EN 15804 +A1 standard, all inputs and outputs for which data are available were taken into account in the calculation. Eventual data gaps have been filled with conservative assumptions of average data or generic data available in the Ecoinvent v3.5 database (released in 2018) of the SimaPro software. All flows contributing to more than 1 % of the total mass, energy or environmental impact of the system have been included in the life cycle assessment. Eventual neglected processes do not contribute in total more than 5% to the impact categories considered. Because of these reasons, the influence of the additives present in the composition of the NHL-based products has been neglected. Moreover, the manufacture of machinery, plants and other infrastructure required for production of the products under review was not taken into consideration in the present analysis.

3.5 Period under review

The specific data were obtained directly by the commissioning company, and are related to the production of one year. The data are referred to the period June 2017-June 2018. They were obtained by means of specific measures related to the energy consumption and mass flows in the plant of Ville d'Anaunia (Trento), where the NHL is produced, and to the mass and energy flows in the plant of Molveno (Trento), where the Dolomia used as inert material in the premixed products is extracted and processed. Manufacturer-specific data are referred to the period 2017-2018, while generic data are less than 10 years old. Moreover, process-specific data are based on the average of an operating year.

3.6 Comparability

In order to assure the comparability of the obtained results, all datasets to be compared have been created in accordance with EN 15804, and the product-specific performance characteristics have been taken into account. Basically, a comparison or an evaluation of EPD data is only possible if all the data sets to be compared were created according to EN 15804 and the building context, respectively the product specific characteristics of performance, are taken into account.

4. LCA: Results

In Table 3 the results referred to the LCA of the NHL based plaster are reported.


Table 3: LCA results of the NHL based plaster.

Description of the system boundary (X = Included in LCA; MND = Module not declared)																
Product stage			Construction process stage		Use stage							End of life stage				Benefits and loads beyond the system boundaries
Raw material supply	Transport	Manufacturing	Transport from manufacturer to place of use	Construction-installation process	Use	Maintenance	Repair	Replacement	Refurbishmen	Operational energy use	Operational water use	De-construction / demolition	Transport	Waste processing	Disposal	Reuse-Recovery-Recycling-potential
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
X	X	X	MND	MND	MND	MND	MND	MND	MND	MND	MND	MND	MND	MND	MND	MND
Results of the LCA –Environmental impact: NHL based plaster																
Parameter		Unit	A1-A3													
Global warming potential		[kg CO ₂ -Eq.]	9.18E+01													
Depletion potential of the stratospheric ozone layer		[kg CFC11-Eq.]	5.63E-06													
Acidification potential of land and water		[kg SO ₂ -Eq.]	6.19E-01													
Eutrophication potential		[kg (PO ₄) ³ -Eq.]	2.02E-01													
Formation potential of tropospheric ozone photochemical oxidants		[kg Ethen-Eq.]	3.46E-02													
Abiotic depletion potential for non fossil resources		[kg Sb-Eq.]	6.01E-05													
Abiotic depletion potential for fossil resources		[MJ]	1.08E+03													
Results of the LCA –Resource use: NHL based plaster																
Parameter		Unit	A1-A3													
Renewable primary energy as energy carrier		[MJ]	2.54E+02													
Renewable primary energy resources as material utilization		[MJ]	IND													
Total use of renewable primary energy resources		[MJ]	2.54E+02													
Non renewable primary energy as energy carrier		[MJ]	1.30E+03													
Non renewable primary energy as material utilization		[MJ]	IND													
Total use of non renewable primary energy resources		[MJ]	1.30E+03													
Use of secondary material		[kg]	IND													
Use of renewable secondary fuels		[MJ]	IND													
Use of non renewable secondary fuels		[MJ]	IND													
Use of net fresh water		[m ³]	9.60E-01													
Results of the LCA –Output flows and waste categories: NHL based plaster																
Parameter		Unit	A1-A3													
Hazardous waste disposed		[kg]	1.04E-03													
Non hazardous waste disposed		[kg]	IND													
Radioactive waste disposed		[kg]	2.97E-03													
Building materials for re-use		[kg]	IND													
Materials for recycling		[kg]	1.00E+03													
Materials for energy recovery		[kg]	IND													
Exported energy		[MJ]	IND													

5. LCA: Interpretation

In Figure 1 the relative contribution of the different inputs on the GWP of the NHL based plaster is reported. Even if natural hydraulic lime takes far less energy in the production process with respect to a traditional cement based mortar, due to lower processing temperatures and to the lower raw materials required, it can be seen that a considerable amount of the environmental impact (i.e. 64.9 %) is due to the coal furnace utilized for the thermal treatment of the lime, taking also into account the provision of the coal for the furnace (6.0 %). In this sense, changing the energy source and improving the efficiency of the lime furnace could lead to a strong reduction of the overall environmental impact, also in the other impact categories. Also the use of compressed air (7.6 %) and of the electrical energy (10.1 %) during the processing affect the environmental performance of the product. The environmental impact of the dolomite extraction, thanks also to the allocation principles adopted (i.e. the concomitant utilization of the extraction cave by Melinda company for the storage of the apples), is rather limited (4.5 %). On the other hand, the extraction of the limestone (0.5 %) and the transport stages (0.7 %) play a minor role.

Figure 1: Relative contribution of the different inputs on the GWP of the NHL based plaster.

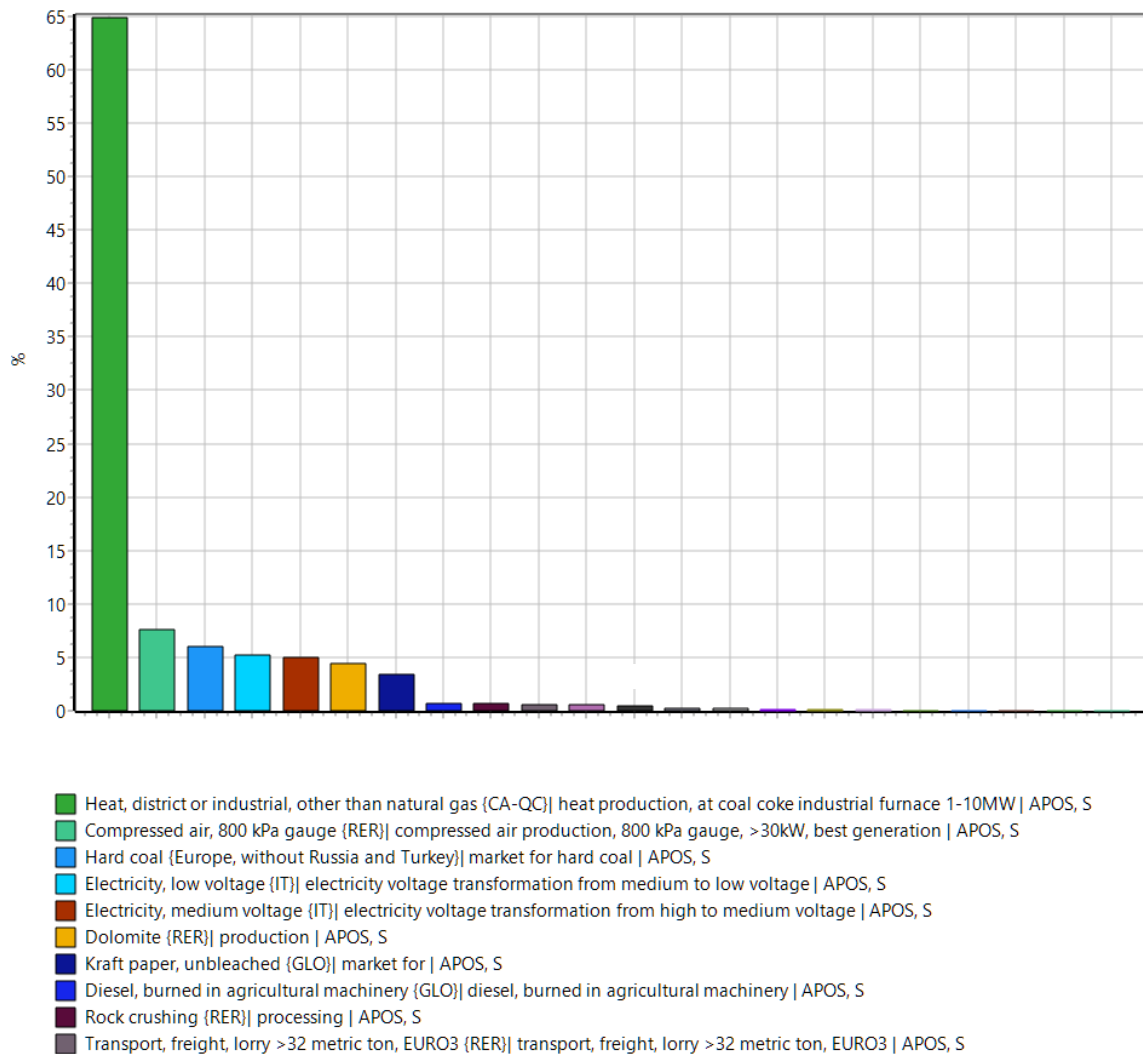

6. References

- DIN EN ISO 14044:2006-10, Environmental management - Life cycle assessment - Requirements and guidelines (ISO 14044:2006 + Amd 1:2017); German version EN ISO 14044:2006 + A1:2018.
- DIN EN 15804:2014-07, Sustainability of construction works - Environmental product declarations - Core rules for the product category of construction products; German version EN 15804:2012+A1:2013.
- CEN/TR 15941:2010-03: Sustainability of construction works - Environmental product declarations – Methodology for selection and use of generic data; German version CEN/TR 15941:2010.
- UNI EN ISO 14040:2006 – Environmental management – Life Cycle Assessment – Principles and framework.

Annex I. Requirements of the Minimum Environmental Criteria (DM October 11th 2017)

In Table 4 the requirements imposed by Minimum Environmental Criteria (DM October 11th 2017) for the product considered in this EPD are summarized. As it can be seen, this product satisfies the legislative requirements imposed by the Italian Legislation on the Minimum Environmental Criteria for construction services.

Table 4: Requirements of the Minimum Environmental Criteria (DM October 11th 2017) for the product considered in this EPD.

Point 2.4 Technical specifications of the building components			
Point 2.4.1.1	Disassemblability	The product considered in this EPD, after the dismantling operations, can be fully recovered and recycled.	
Point 2.4.1.2	Recovered of recycled material	The product considered in this EPD is fully developed starting from virgin materials, as required for lime based products by D.Lgs. 152/2006.	
Point 2.4.1.3	Dangerous substances	The product considered in this EPD does not contain additives with cadmium, lead, chromium VI, mercury, arsenic and selenium in concentration higher than 0.010 wt%.	
Point 2.4.2.1	Premixed concrete or prepared on the building site	The product considered in this EPD is fully developed starting from virgin materials, as required for lime based products by D.Lgs. 152/2006.	This requirement can not be applied to this product, since it is a lime based product (see D.Lgs. 152/2006).
Point 2.5 Technical specifications of the building site			
Point 2.5.1	Dismantling and removal of the materials	The product considered in this EPD, after the dismantling operations, can be fully sent to reuse, recovery and recycling operations.	

	<p>Publisher Kiwa BCS Öko-Garantie GmbH – Ecobility Experts Marientorbogen 3-5 90402 Nürnberg Deutschland/Germany</p>	<p>Mail Web</p>	<p>ecobility@bcs-oeko.de https://www.kiwa.com/de/de/uber-kiwa/ecobility-experts/</p>
	<p>Programme holder Kiwa BCS Öko-Garantie GmbH – Ecobility Experts Marientorbogen 3-5 90402 Nürnberg Deutschland/Germany</p>	<p>Mail Web</p>	<p>ecobility@bcs-oeko.de https://www.kiwa.com/de/de/uber-kiwa/ecobility-experts/</p>
	<p>Author of the Life Cycle Assessment Prof. Andrea Dorigato University of Trento Department of Industrial Engineering (DII) Via Sommarive 9 38123 Trento (Italy)</p>	<p>Tel. Fax. Mail Web</p>	<p>(+39) 0461/283724 andrea.dorigato@unitn.it https://webapps.unitn.it/du/it/Persona/PER0009668/Curriculum</p>
<p>GRUPPOMINIERASANROMEDIO</p>	<p>Owner of the declaration Miniera San Romedio Srl Località alla Miniera 38012 Predaia (Italy) VAT Number 00602230229</p>	<p>Tel. Fax. Mail Web</p>	<p>(+39) 0463/662100 (+39) 0463/662113 minierasanromedio@pec.it www.minierasanromedio.it</p>